

***FR20X SERIES***

***FAST RECOVERY RECTIFIER***

产

品

规

格

确

认

书

# FR201 THRU FR207

## FAST RECOVERY RECTIFIER



康 比 電 子  
HORNBY ELECTRONIC


**REVERSE VOLTAGE:** 50 to 1000 VOLTS  
**FORWARD CURRENT:** 2.0 AMPERE

### FEATURES

- High current capability
- 2.0 ampere operation at  $T_A=55$  with no thermal runaway.
- Fast switching for high efficiency
- Exceeds environmental standards of MIL-S-19500/228
- Low leakage.

### MECHANICAL DATA

Case: Molded plastic, DO-15  
Epoxy: UL 94V-O rate flame retardant  
Lead: Axial leads, solderable per MIL-STD-202, method 208 guaranteed  
Polarity: Color band denotes cathode end  
Mounting position: Any  
Weight: 0.015ounce, 0.4gram

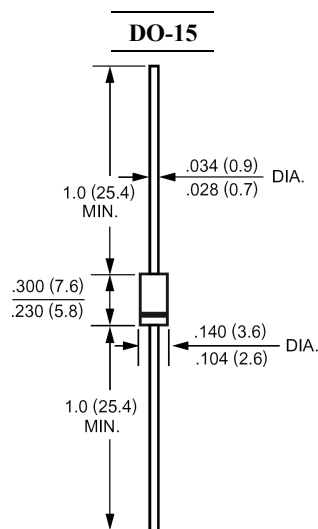

Dimensions in inches and (millimeters)

### Maximum Ratings and Electrical Characteristics

Ratings at 25 ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

|   | Symbols                           | FR201       | FR202 | FR203 | FR204 | FR205 | FR206 | FR207 | Units |
|---|-----------------------------------|-------------|-------|-------|-------|-------|-------|-------|-------|
| Maximum Recurrent Peak Reverse Voltage  | V <sub>RRM</sub>                  | 50          | 100   | 200   | 400   | 600   | 800   | 1000  | Volts |
| Maximum RMS Voltage   | V <sub>RMS</sub>                  | 35          | 70    | 140   | 280   | 420   | 560   | 700   | Volts |
| Maximum DC Blocking Voltage   | V <sub>DC</sub>                   | 50          | 100   | 200   | 400   | 600   | 800   | 1000  | Volts |
| Maximum Average Forward Rectified Current<br>.375"(9.5mm) Lead Length at T <sub>A</sub> =55             | I <sub>(AV)</sub>                 | 2.0         |       |       |       |       |       |       | Amp   |
| Peak Forward Surge Current,<br>8.3ms single half-sine-wave<br>superimposed on rated load (JEDEC method) | I <sub>FSM</sub>                  | 70          |       |       |       |       |       |       | Amp   |
| Maximum Forward Voltage<br>at 2.0A DC and 25  | V <sub>F</sub>                    | 1.3         |       |       |       |       |       |       | Volts |
| Maximum Reverse Current at T <sub>A</sub> =25<br>at Rated DC Blocking Voltage T <sub>A</sub> =100       | I <sub>R</sub>                    | 5.0<br>500  |       |       |       |       |       |       | uAmp  |
| Typical Junction Capacitance (Note 1)   | C <sub>J</sub>                    | 35          |       |       |       |       |       |       | pF    |
| Typical Thermal Resistance (Note 2)   | R <sub>θJA</sub>                  | 22          |       |       |       |       |       |       | /W    |
| Maximum Reverse Recovery Time (Note 3)  | T <sub>RR</sub>                   | 150         |       |       |       | 250   | 500   |       | nS    |
| Operating and Storage Temperature Range   | T <sub>J</sub> , T <sub>stg</sub> | -55 to +150 |       |       |       |       |       |       |       |

### NOTES:

1- Measured at 1 MHz and applied reverse voltage of 4.0 VDC.

2- Thermal Resistance From Junction to Ambient 0.375"(9.5mm) lead length P.C.B. Mounted.

3- Reverse Recovery Test Conditions :  $I_F=.5A$  ,  $I_R=1A$  ,  $I_{RR}=.25A$ .

# FR201 THRU FR207

## FAST RECOVERY RECTIFIER



### RATINGS AND CHARACTERISTIC CURVES

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

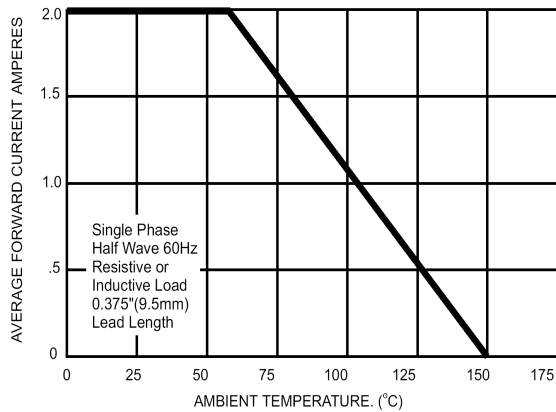


FIG. 2 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

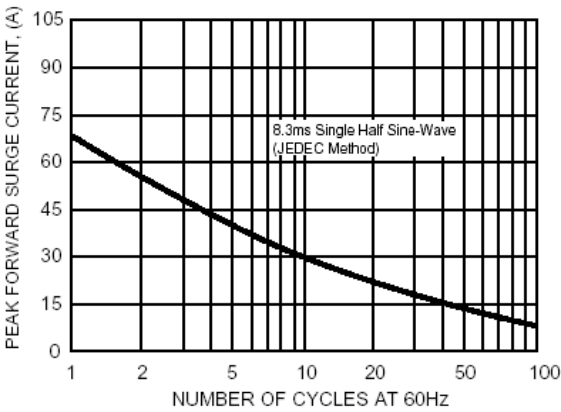


FIG.3- TYPICAL FORWARD CHARACTERISTICS

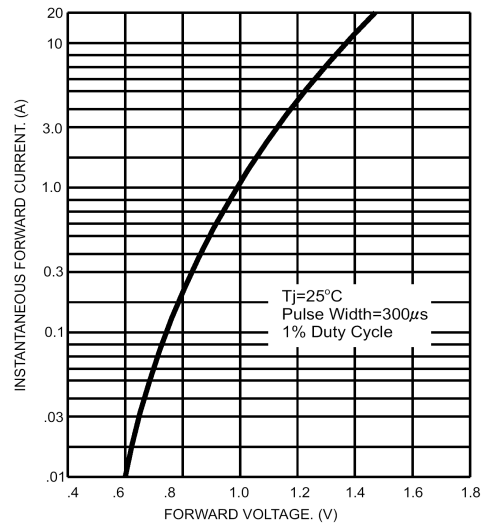


FIG.4- TYPICAL JUNCTION CAPACITANCE

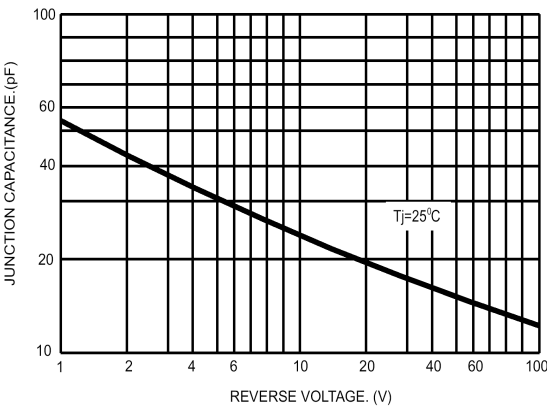


FIG.5- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

