

BA15X SERIES

FAST RECOVERY RECTIFIER

产

品

规

格

确

认

书

BA157 THRU BA159

FAST RECOVERY RECTIFIER



康比電子
HORNBY ELECTRONIC


REVERSE VOLTAGE: 400 to 1000 VOLTS
FORWARD CURRENT: 1.0 AMPERE

FEATURES

- High surge current capability
- 1.0 ampere operation at $T_A=55$ with no thermal runaway.
- Void-free Plastic in a DO-41 package.
- Fast switching for high efficiency
- Exceeds environmental standards of MIL-S-19500/228
- Low leakage.

MECHANICAL DATA

Case: Molded plastic, DO-41
Epoxy: UL 94V-O rate flame retardant
Lead: Axial leads, solderable per MIL-STD-202, method 208 guaranteed
Polarity: Color band denotes cathode end
Mounting position: Any
Weight: 0.012ounce, 0.33gram

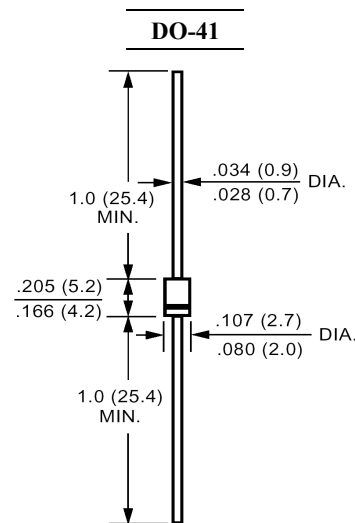

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Ratings at 25 ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

| | Symbols | BA157 | BA158 | BA159 | Units |
|---|-----------------|-------------|-------|-------|-----------|
| Maximum Recurrent Peak Reverse Voltage | V_{RRM} | 400 | 600 | 1000 | Volts |
| Maximum RMS Voltage | V_{RMS} | 280 | 420 | 700 | Volts |
| Maximum DC Blocking Voltage | V_{DC} | 400 | 600 | 1000 | Volts |
| Maximum Average Forward Rectified Current .375"(9.5mm) Lead Length at $T_A=55$ | $I_{(AV)}$ | 1.0 | | | Amp |
| Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method) | I_{FSM} | 30 | | | Amp |
| Maximum Forward Voltage at 1.0A DC and 25 | V_F | 1.3 | | | Volts |
| Maximum Reverse Current at $T_A=25$ at Rated DC Blocking Voltage $T_A=100$ | I_R | 5.0 500 | | | μ Amp |
| Typical Junction Capacitance (Note 1) | C_J | 12 | | | pF |
| Typical Thermal Resistance (Note 2) | $R_{\theta JA}$ | 50 | | | /W |
| Maximum Reverse Recovery Time (Note 3) | T_{RR} | 150 | | 250 | nS |
| Operating and Storage Temperature Range | T_J, T_{stg} | -55 to +150 | | | |

NOTES:

1- Measured at 1 MHz and applied reverse voltage of 4.0 VDC.

2- Thermal Resistance From Junction to Ambient 0.375"(9.5mm) lead length P.C.B. Mounted.

3- Reverse Recovery Test Conditions : $I_F=.5A$, $I_R=1A$, $I_{RR}=.25A$.

BA157 THRU BA159

FAST RECOVERY RECTIFIER



RATINGS AND CHARACTERISTIC CURVES

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

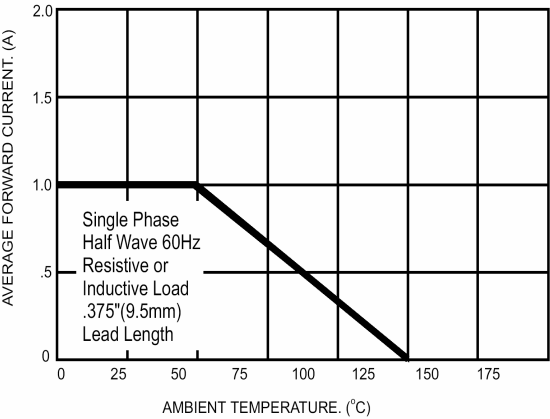


FIG.2- MAXIMUM NON-REPETITIVE PEAK FORDWARD SURGE CURRENT

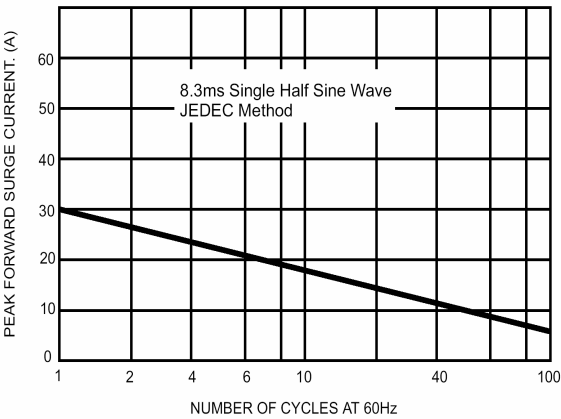


FIG.3- TYPICAL FORWARD CHARACTERISTICS

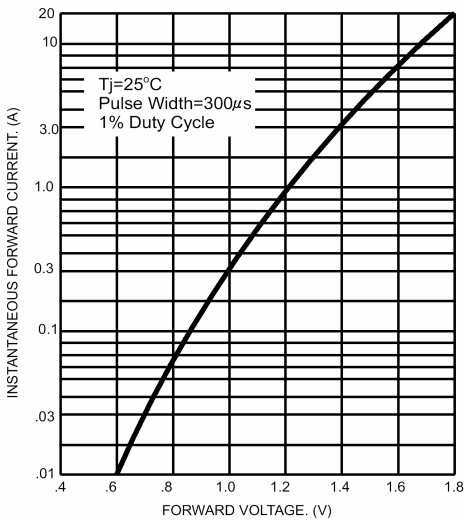


FIG.4- TYPICAL JUNCTION CAPACITANCE

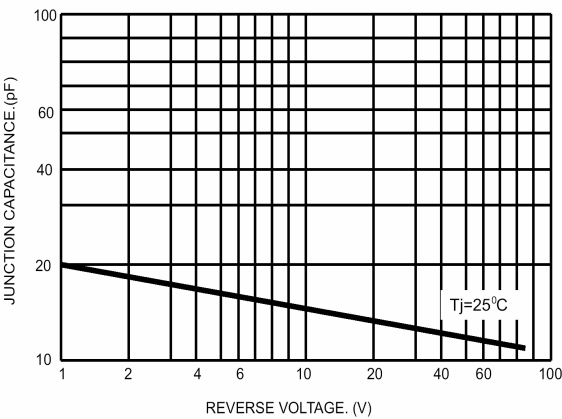


FIG.5- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

