

***RL10X SERIES***

***GENERAL PURPOSE PLASTIC SILICON RECTIFIER***

产

品

规

格

确

认

书

# RL101 THRU RL107



康 比 電 子  
HORNBY ELECTRONIC

## GENERAL PURPOSE PLASTIC SILICON RECTIFIER

**REVERSE VOLTAGE:** 50 to 1000 VOLTS

**FORWARD CURRENT:** 1.0 AMPERE

### FEATURES

- Low forward voltage drop
- High current capability
- High capability
- High surge current capability
- Exceeds environmental standards of MIL-S-19500/228

### MECHANICAL DATA

Case: Molded plastic, A-405


Epoxy: UL 94V-O rate flame retardant

Lead: Axial leads, solderable per MIL-STD-202, method 208 guaranteed

Polarity: Color band denotes cathode end

Mounting position: Any

Weight: 0.008ounce, 0.22gram

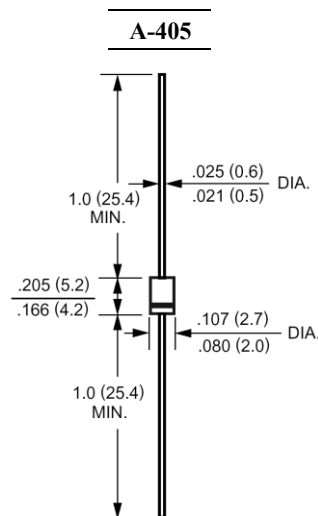

Dimensions in inches and (millimeters)

### Maximum Ratings and Electrical Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

|   | Symbols         | RL101       | RL102 | RL103 | RL104 | RL105 | RL106 | RL107 | Units |
|---|-----------------|-------------|-------|-------|-------|-------|-------|-------|-------|
| Maximum Recurrent Peak Reverse Voltage  | $V_{RRM}$       | 50          | 100   | 200   | 400   | 600   | 800   | 1000  | Volts |
| Maximum RMS Voltage   | $V_{RMS}$       | 35          | 70    | 140   | 280   | 420   | 560   | 700   | Volts |
| Maximum DC Blocking Voltage   | $V_{DC}$        | 50          | 100   | 200   | 400   | 600   | 800   | 1000  | Volts |
| Maximum Average Forward Rectified Current<br>.375"(9.5mm) Lead Length at $T_A=75$                       | $I_{(AV)}$      | 1.0         |       |       |       |       |       |       | Amp   |
| Peak Forward Surge Current,<br>8.3ms single half-sine-wave<br>superimposed on rated load (JEDEC method) | $I_{FSM}$       | 30          |       |       |       |       |       |       | Amp   |
| Maximum Forward Voltage<br>at 1.0A DC and 25  | $V_F$           | 1.1         |       |       |       |       |       |       | Volts |
| Maximum Reverse Current at $T_A=25$<br>at Rated DC Blocking Voltage $T_A=100$                           | $I_R$           | 5.0<br>500  |       |       |       |       |       |       | uAmp  |
| Typical Junction Capacitance (Note 1)   | $C_J$           | 15          |       |       |       |       |       |       | pF    |
| Typical Thermal Resistance (Note 2)   | $R_{\theta JA}$ | 50          |       |       |       |       |       |       | /W    |
| Operating Junction Temperature Range  | $T_J$           | -55 to +150 |       |       |       |       |       |       |       |
| Storage Temperature Range   | $T_{stg}$       | -55 to +150 |       |       |       |       |       |       |       |

### NOTES:

1- Measured at 1 MHz and applied reverse voltage of 4.0 VDC.

2- Thermal Resistance From Junction to Ambient 0.375"(9.5mm) lead length P.C.B. Mounted.

# RL101 THRU RL107

## GENERAL PURPOSE PLASTIC SILICON RECTIFIER



### RATINGS AND CHARACTERISTIC CURVES

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

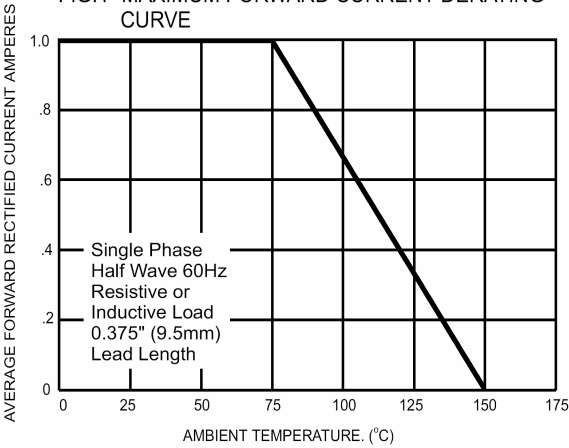


FIG.2- TYPICAL FORWARD CHARACTERISTICS

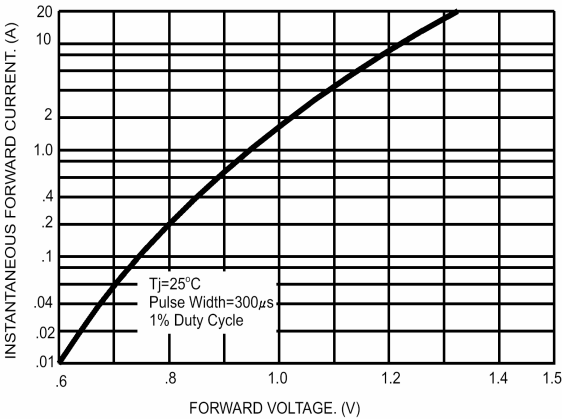


FIG.3- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

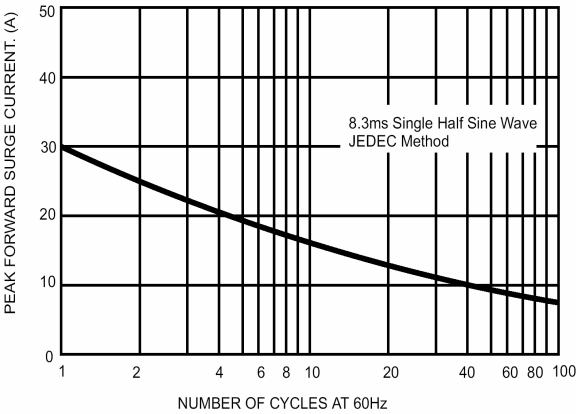


FIG.4- TYPICAL JUNCTION CAPACITANCE

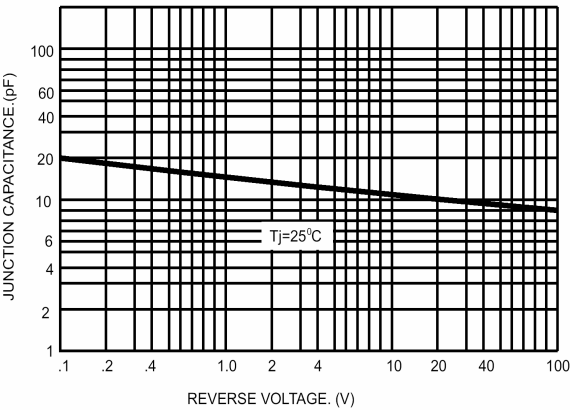


FIG.5- TYPICAL REVERSE CHARACTERISTICS

