

***SF5X SERIES***

***SUPERFAST RECOVERY RECTIFIER***

产

品

规

格

确

认

书

# SF51 THRU SF58

## SUPERFAST RECOVERY RECTIFIER



康 比 電 子  
HORNBY ELECTRONIC

**REVERSE VOLTAGE:** 50 to 600 VOLTS

**FORWARD CURRENT:** 5.0 AMPERE

### FEATURES

- High surge capability
- Low forward voltage, high current capability
- Hermetically sealed
- Superfast recovery times
- Exceeds environmental standards of MIL-S-19500/228
- Low leakage.

### MECHANICAL DATA

Case: Molded plastic, DO-201AD

Epoxy: UL 94V-O rate flame retardant


Lead: Axial leads, solderable per MIL-STD-202,  
method 208 guaranteed

Polarity: Color band denotes cathode end

Mounting position: Any

Weight: 0.04ounce, 1.1gram

### DO-201AD

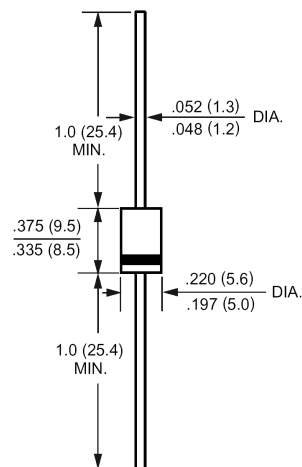

Dimensions in inches and (millimeters)

### Maximum Ratings and Electrical Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

	Symbols	SF51	SF52	SF53	SF54	SF55	SF56	SF58	Units
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	50	100	150	200	300	400	600	Volts
Maximum RMS Voltage	V <sub>RMS</sub>	35	70	105	140	210	280	420	Volts
Maximum DC Blocking Voltage	V <sub>DC</sub>	50	100	150	200	300	400	600	Volts
Maximum Average Forward Rectified Current .375"(9.5mm) Lead Length at T <sub>A</sub> =55	I <sub>(AV)</sub>	5.0							Amp
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	I <sub>FSM</sub>	150							Amp
Maximum Forward Voltage at 5.0A DC and 25	V <sub>F</sub>	0.95				1.25		1.7	Volts
Maximum Reverse Current at T <sub>A</sub> =25 at Rated DC Blocking Voltage T <sub>A</sub> =100	I <sub>R</sub>	5.0 500							uAmp
Typical Junction Capacitance (Note 1)	C <sub>J</sub>	45							pF
Typical Thermal Resistance (Note 2)	R <sub>θJA</sub>	25							/W
Maximum Reverse Recovery Time (Note 3)	T <sub>RR</sub>	35						50	nS
Operating Junction Temperature Range	T <sub>J</sub>	-55 to +125							
Storage Temperature Range	T <sub>stg</sub>	-55 to +150							

### NOTES:

1- Measured at 1 MHz and applied reverse voltage of 4.0 VDC.

2- Thermal Resistance Junction to Ambient and from junction to lead at 0.375"(9.5mm) lead length P.C.B. Mounted.

3- Reverse Recovery Test Conditions :  $I_F=.5A$  ,  $I_R=1A$  ,  $I_{RR}=.25A$ .

# SF51 THRU SF58

## SUPERFAST RECOVERY RECTIFIER



### RATINGS AND CHARACTERISTIC CURVES

FIG. 1 - TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

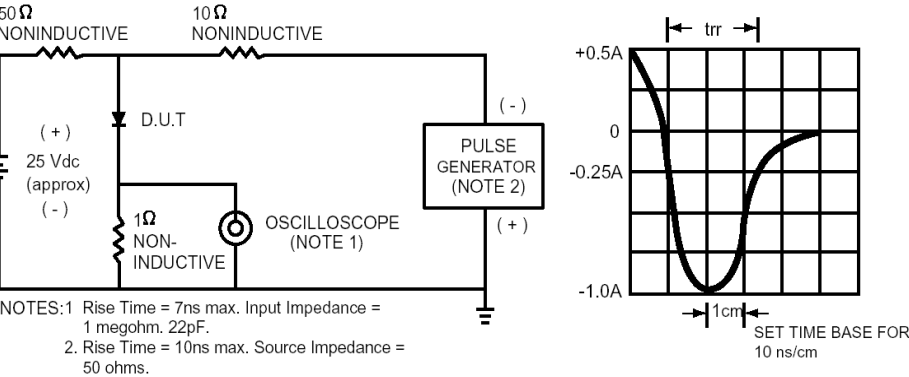


FIG. 2 - TYPICAL FORWARD CURRENT DERATING CURVE

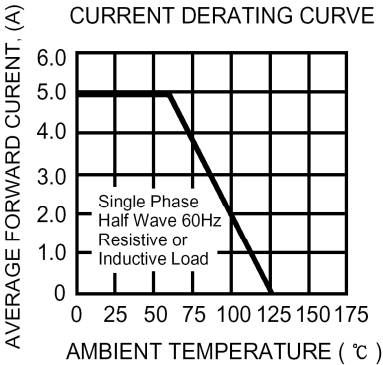


FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

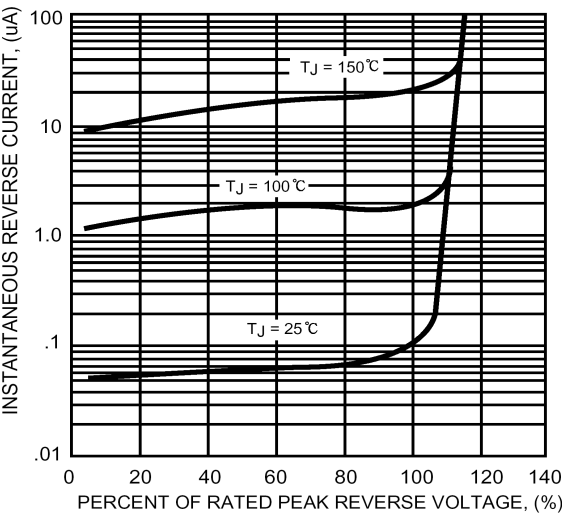


FIG. 4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

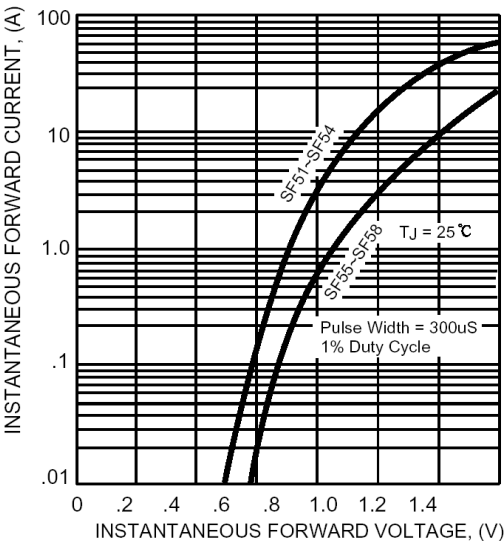


FIG. 5 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

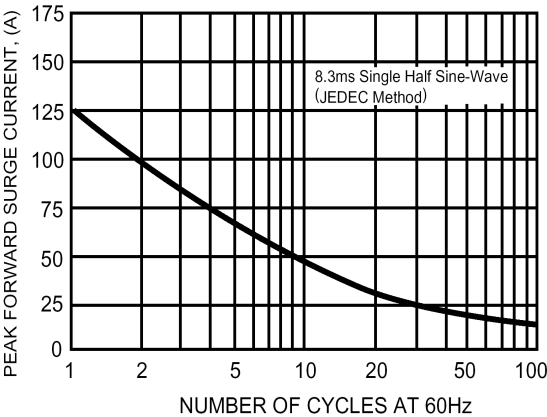


FIG. 6 - TYPICAL JUNCTION CAPACITANCE

