

***SR1X0 SERIES***

***SCHOTTKY BARRIER RECTIFIER***

产

品

规

格

确

认

书

# SR120 THRU SR1100

## SCHOTTKY BARRIER RECTIFIER



康 比 電 子  
HORNBY ELECTRONIC

**REVERSE VOLTAGE:** 20 to 100 VOLTS  
**FORWARD CURRENT:** 1.0 AMPERE

### FEATURES

- High current capability
- High surge current capability
- Low forward voltage drop
- Exceeds environmental standards of MIL-S-19500/228
- For use in low voltage, high frequency inverters free wheeling, and porlarlity protection applications

### MECHANICAL DATA

Case: Molded plastic, DO-41


Epoxy: UL 94V-O rate flame retardant

Lead: Axial leads, solderable per MIL-STD-202, method 208 guaranteed

Polarity: Color band denotes cathode end

Mounting position: Any

Weight: 0.012ounce, 0.33gram

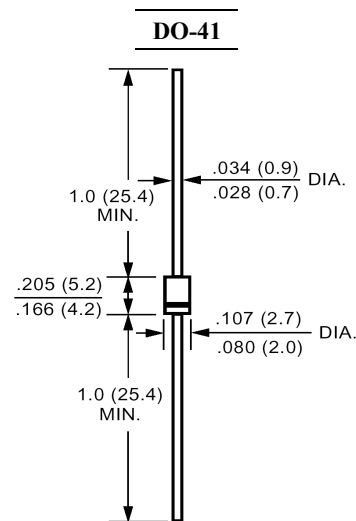

Dimensions in inches and (millimeters)

### Maximum Ratings and Electrical Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

	Symbols	SR120	SR130	SR140	SR150	SR160	SR180	SR1100	Units
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	20	30	40	50	60	80	100	Volts
Maximum RMS Voltage	V <sub>RMS</sub>	14	21	28	35	42	56	70	Volts
Maximum DC Blocking Voltage	V <sub>DC</sub>	20	30	40	50	60	80	100	Volts
Maximum Average Forward Rectified Current .375"(9.5mm) Lead Length	I <sub>(AV)</sub>	1.0							Amp
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	I <sub>FSM</sub>	30							Amp
Maximum Forward Voltage at 1.0A DC and 25	V <sub>F</sub>	0.55			0.70		0.85		Volts
Maximum Reverse Current at T <sub>A</sub> =25 at Rated DC Blocking Voltage T <sub>A</sub> =100	I <sub>R</sub>	0.5 10							mAmp
Typical Junction Capacitance (Note 1)	C <sub>J</sub>	110							pF
Typical Thermal Resistance (Note 2)	R <sub>θJA</sub>	50							/W
Operating Junction Temperature Range	T <sub>J</sub>	-55 to +125			-55 to +150				
Storage Temperature Range	T <sub>stg</sub>	-55 to +150							

### NOTES:

1- Measured at 1 MHz and applied reverse voltage of 4.0 VDC.

2- Thermal Resistance From Junction to Ambient 0.375"(9.5mm) lead length P.C.B. Mounted with 0.22x0.22" (5.5x5.5mm) copper pads

# SR120 THRU SR1100

## SCHOTTKY BARRIER RECTIFIER



### RATINGS AND CHARACTERISTIC CURVES

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

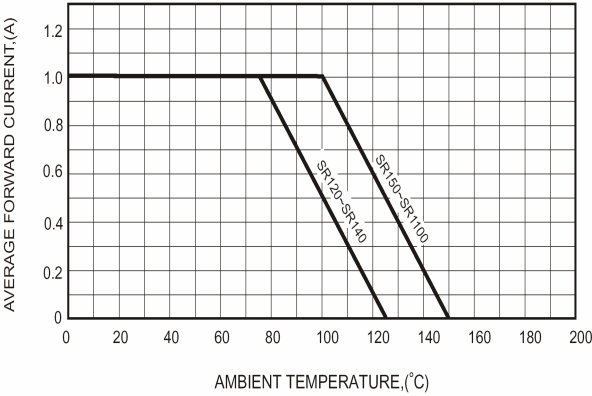


FIG.2-TYPICAL FORWARD CHARACTERISTICS

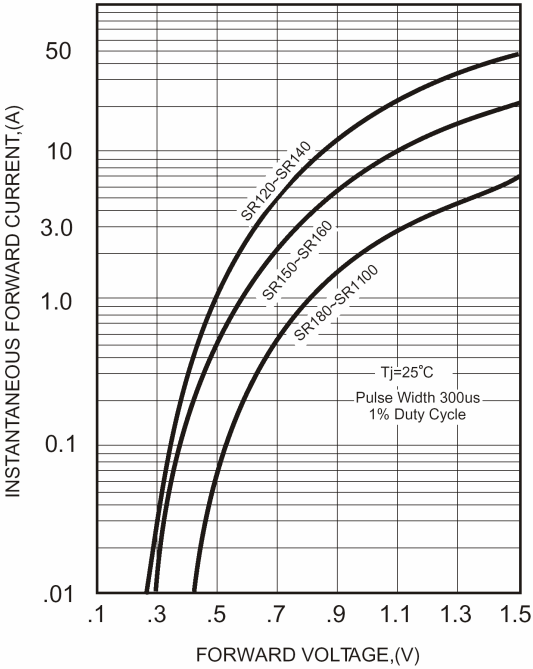


FIG.3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

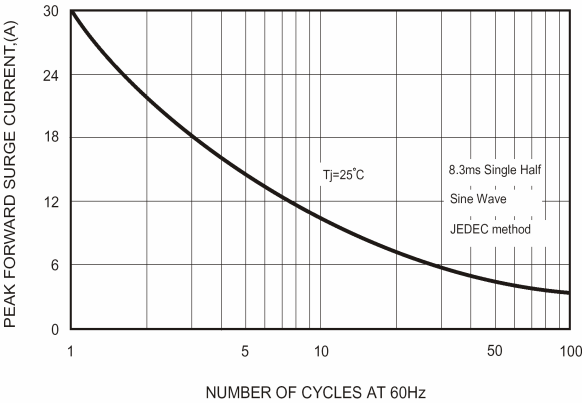


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

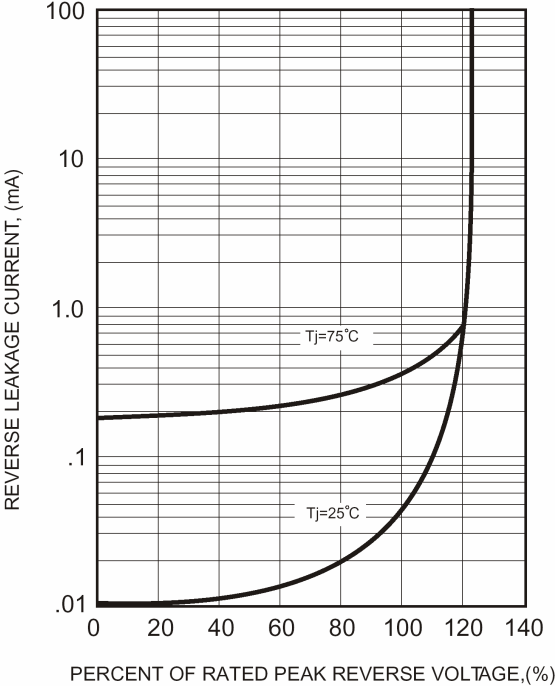


FIG.4-TYPICAL JUNCTION CAPACITANCE

