



KBU4005 THRU KBU410

Single Phase 4.0 AMPS. Glass Passivated Bridge Rectifiers


Voltage Range: 50 to 1000 Volts Current : 4.0 Amperes

Features

- UL Recognized File # E-230084
- Ideal for printed circuit board
- Reliable low cost construction technique results in inexpensive product
- High temperature soldering guaranteed:
260 °C / 10 seconds / 0.375" (9.5mm)
lead length at 5 lbs., (2.3 kg) tension

Mechanical Data

- Case: Molded plastic
- Lead: solder plated
- Polarity: As marked

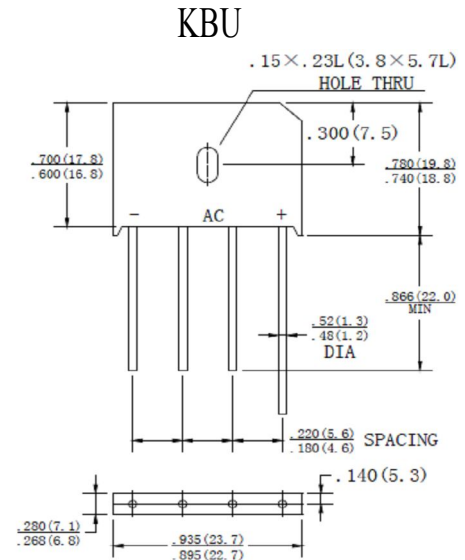

Dimension in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number		KBU 4005	KBU 401	KBU 402	KBU 404	KBU 406	KBU 408	KBU 410	UNITS
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @T _A = 50℃	I(AV)	4.0							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I _{FSM}	150							A
Maximum Instantaneous Forward Voltage @ 4.0A	V _F	1.0							V
Maximum DC Reverse Current @ TA=25℃ rated DC blocking voltage per leg TA = 125℃	I _R	5 500							μ A
Typical Thermal Resistance (Note1) (Note2)	R _{Θ JA} R _{Θ JL}	19 4.0							℃/W
Operating Temperature Range	T _J	-55 to +150							℃
Storage Temperature Range	T _{STG}	-55 to +150							℃

NOTE : 1. Units Mounted on P.C.B. with 0.5×0.5" (12×12mm) Copper Pads, 0.375" (9.5mm) Lead Length.

2. Units Mounted on a 2.0×1.6×0.3" Thick (5×4×0.8cm) Al. Plate.

RATING AND CHARACTERISTIC CURVES

FIG.1-MAXIMUM NONO-REPETITIVE FORWARD SURGE CURRENT PER BRIDGE ELEMENT

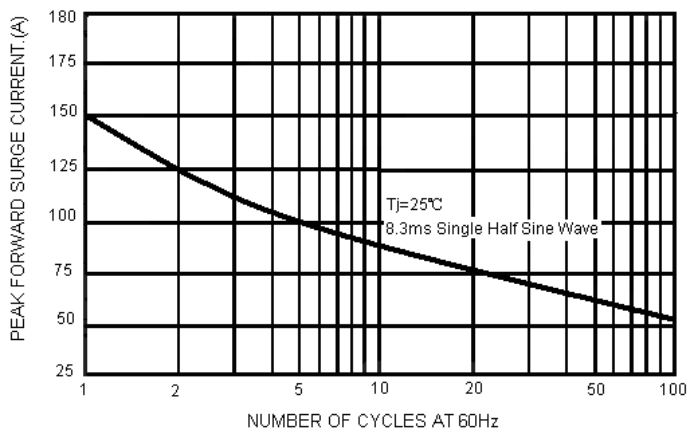


FIG.2-MAXIMUM FORWARD CURRENT DERATING CURVE

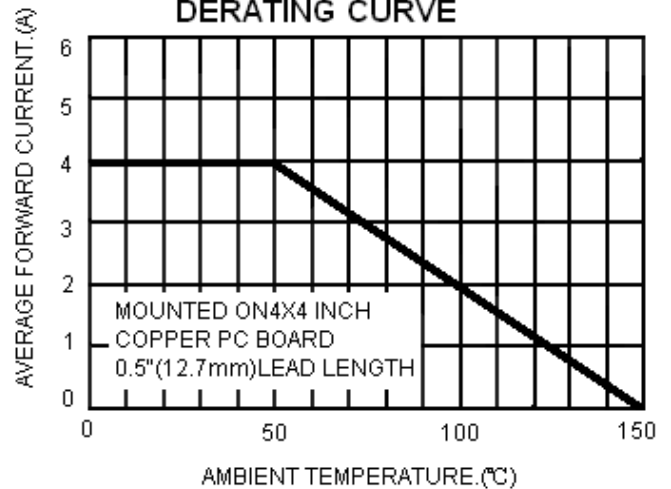


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER BRIDGE ELEMENT

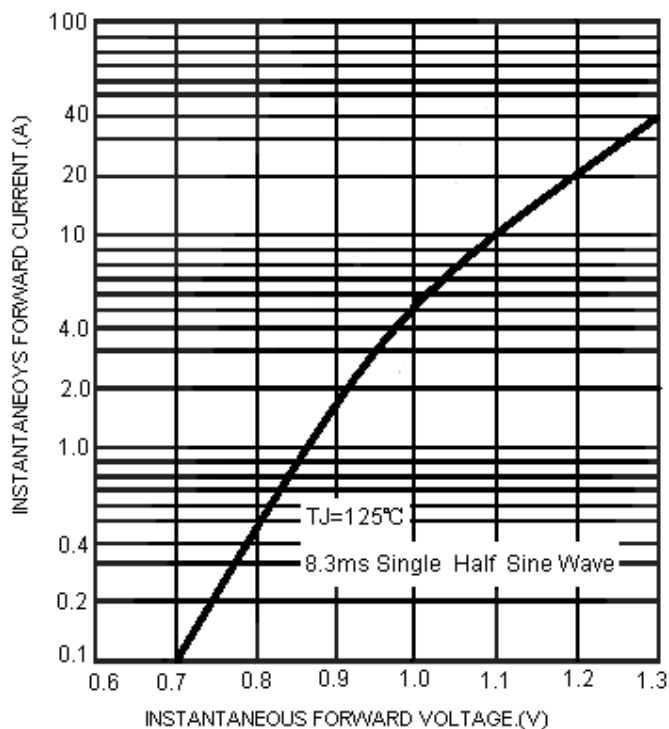


FIG.4-TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT

