




# HER101 THRU HER108

## HIGH EFFICIENCY RECTIFIERS

Reverse Voltage - 50 to 1000 Volts Forward Current - 1.0 Ampere

### DO-41

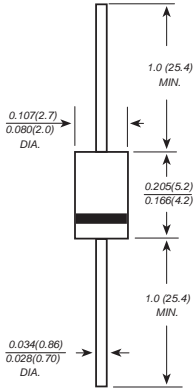

Dimensions in inches and (millimeters)

### FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ High speed switching for high efficiency
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 250°C/10 seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension

### MECHANICAL DATA

**Case:** JEDEC DO-41 molded plastic body  
**Terminals:** Plated axial leads, solderable per MIL-STD-750, Method 2026  
**Polarity:** Color band denotes cathode end  
**Mounting Position:** Any  
**Weight:** 0.012 ounce, 0.34 grams

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

|  | SYMBOLS        | HER 101      | HER 102 | HER 103 | HER 104 | HER 105 | HER 106 | HER 107 | HER 108 | UNITS   |
|--|----------------|--------------|---------|---------|---------|---------|---------|---------|---------|---------|
| Maximum repetitive peak reverse voltage  | $V_{RRM}$      | 50           | 100     | 200     | 300     | 400     | 600     | 800     | 1000    | VOLTS   |
| Maximum RMS voltage  | $V_{RMS}$      | 35           | 70      | 140     | 210     | 280     | 420     | 560     | 700     | VOLTS   |
| Maximum DC blocking voltage  | $V_{DC}$       | 50           | 100     | 200     | 300     | 400     | 600     | 800     | 1000    | VOLTS   |
| Maximum average forward rectified current<br>0.375" (9.5mm) lead length at $T_A=50$ C                  | $I_{AV}$       | 1.0          |         |         |         |         |         |         |         | Amps    |
| Peak forward surge current<br>8.3ms single half sine-wave superimposed on<br>rated load (JEDEC Method) | $I_{FSM}$      | 30.0         |         |         |         |         |         |         |         | Amps    |
| Maximum instantaneous forward voltage at 1.0A  | $V_F$          | 1.0          |         | 1.3     |         | 1.70    |         |         | Volts   |         |
| Maximum DC reverse current $T_A=25$ C<br>at rated DC blocking voltage $T_A=100$ C                      | $I_R$          | 5.0<br>100.0 |         |         |         |         |         |         |         | $\mu A$ |
| Maximum reverse recovery time (NOTE 1)   | $t_{rr}$       | 50           |         |         |         | 70      |         |         | ns      |         |
| Typical junction capacitance (NOTE 2)  | $C_J$          | 15.0         |         |         |         | 12.0    |         |         | pF      |         |
| Typical thermal resistance (NOTE 3)  | $R_{JA}$       | 50.0         |         |         |         |         |         |         |         | C/W     |
| Operating junction and storage temperature range   | $T_J, T_{STG}$ | -65 to +150  |         |         |         |         |         |         |         | C       |

**Note:** 1. Reverse recovery condition  $I_F=0.5A, I_R=1.0A, I_{rr}=0.25A$


2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

3. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted

# RATINGS AND CHARACTERISTIC CURVES HER101 THRU HER108


AVERAGE FORWARD RECTIFIED CURRENT,  
AMPERES

FIG. 1- FORWARD CURRENT DERATING CURVE

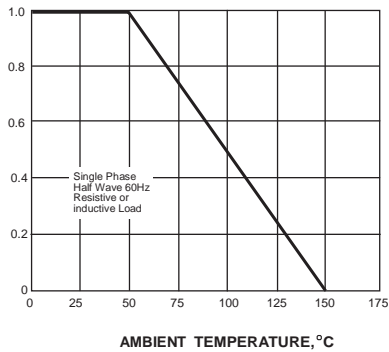


PEAK FORWARD SURGE CURRENT,  
AMPERES

FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

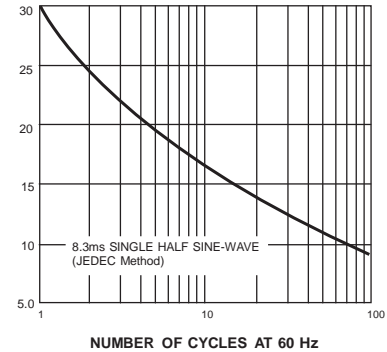


INSTANTANEOUS FORWARD CURRENT, AMPERES

FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

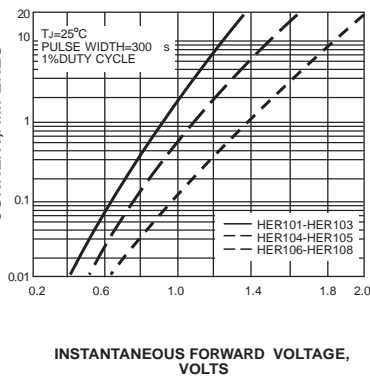


INSTANTANEOUS REVERSE CURRENT,  
MICROAMPERES

FIG. 4-TYPICAL REVERSE CHARACTERISTICS

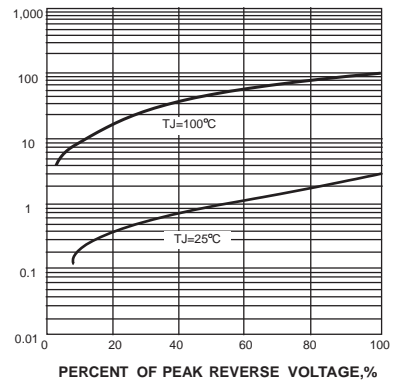

JUNCTION CAPACITANCE, pF

FIG. 5-TYPICAL JUNCTION CAPACITANCE

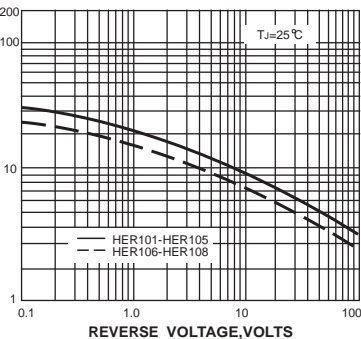

TRANSIENT THERMAL IMPEDANCE,  
°C/W

FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

