



P4SMAJ SERIES

Glass Passivated Unidirectional and Bidirectional Transient Voltage Suppressors

Peak Pulse Power 400 Watts Reverse Voltage 6.8 to 220 Volts


Features

- Glass passivated chip
- 400W peak pulse power capability with a 10/1000 μ s waveform, repetitive rate(duty cycle):0.01%
- Low leakage
- Uni and Bidirectional unit
- Excellent clamping capability
- Very fast response time

Mechanical Data

- Case: Molded plastic
- Epoxy: UL 94V-0 rate flame retardant
- Lead: Solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes cathode end except Bipolar
- Mounting position: Any

SMA/DO-214AC

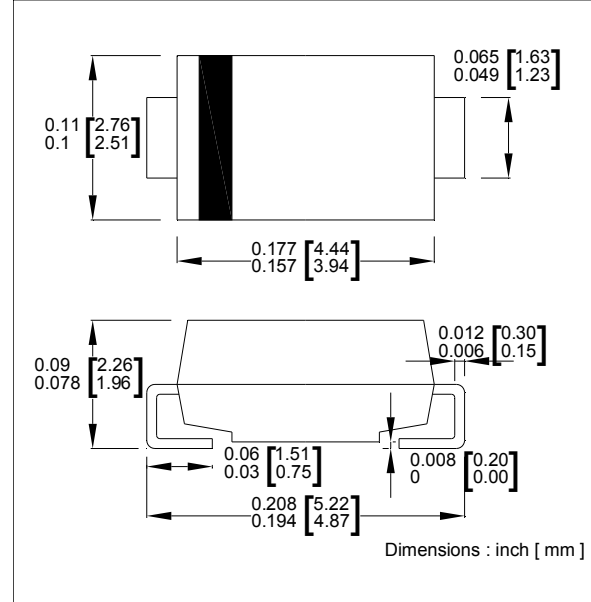

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Parameter	Symbol	Value	Unit
Peak Power dissipation with a 10/100 μ S waveform	P _{PP}	Minimum 400	Watts
Peak pulse current with a 10/1000 μ s waveform	I _{PP}	See Next Table	Amps
Power dissipation on infinite heatsink at T _L =75°C	P _D	1.0	Watts
Peak forward surge current, 8.3ms single half sine-wave unidirectional only ⁽¹⁾	I _{FSM}	40	Amps
Maximum instantaneous forward voltage at 25A for unidirectional only ⁽²⁾	V _F	3.5/5.0	Volts
Operating junction and storage temperature range	T _J , T _{STG}	-55 to +150	°C

Note:

(1) Measured on 8.3 ms single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minute maximum.

RATING AND CHARACTERISTIC CURVES

Fig. 1 - Pulse Derating Curve

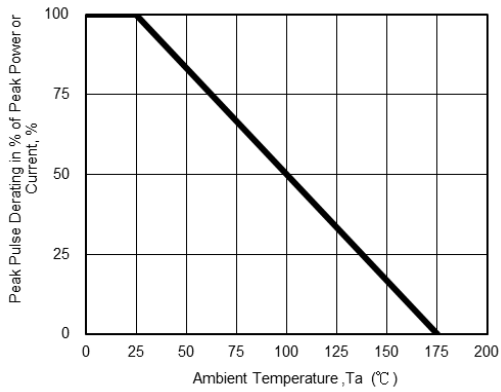


Fig. 2 - Maximum Non-Repetitive

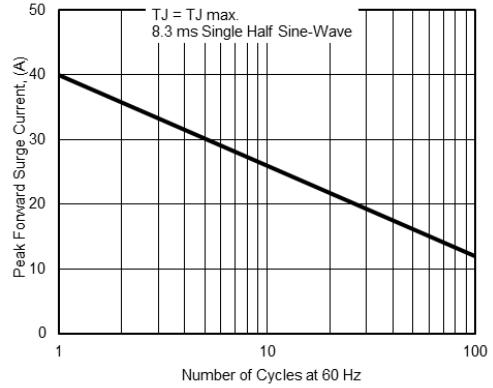


Fig. 3 - Steady State Power Derating Curve

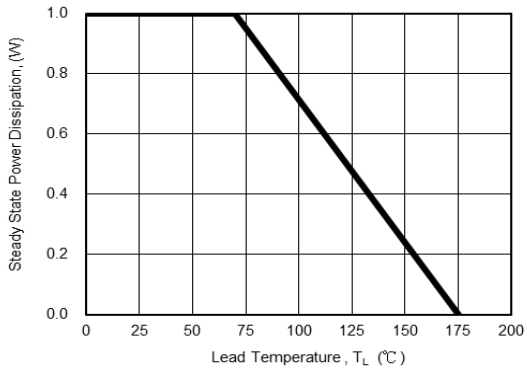


Fig. 4 - Peak Pulse Power Rating Curve


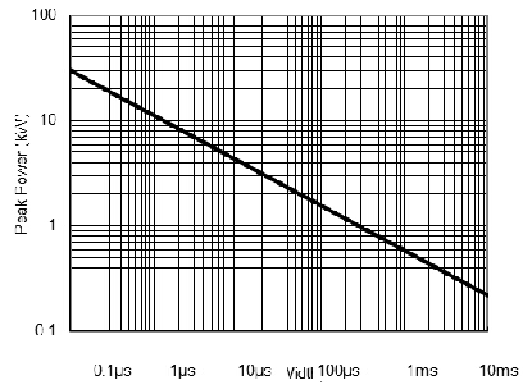


Fig. 5 - Pulse Waveform

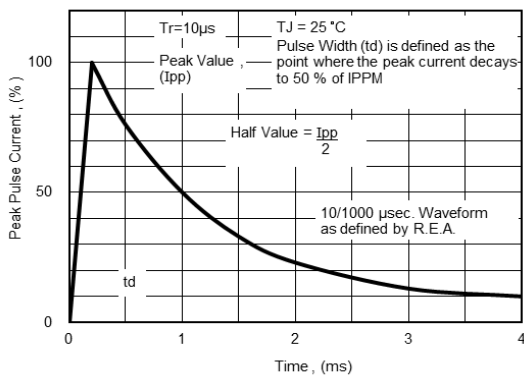

LIFANG ELECTRONICS P4SMAJ SERIES		Device Marking Code		Breakdown voltage VBR @ IT			Maximum Reverse Leakage IR(μA) @VRWM	Working PeakReverse Voltage VRWM (Volts)	Maximum Reverse Surge Current Ipp(A) @10x1000us sinewave	Maximum Clamping Voltage Vc (Volts) @Ipp
SMAJ5.0	SMAJ5.0C	AD	WD	6.40	7.30	10	800	5.0	41.7	9.6
SMAJ5.0A	SMAJ5.0CA	AE	WE	6.40	7.00	10	800	5.0	43.5	9.2
SMAJ6.0	SMAJ6.0C	AF	WF	6.67	8.15	10	800	6.0	35.1	11.4
SMAJ6.0A	SMAJ6.0CA	AG	WG	6.67	7.37	10	800	6.0	38.8	10.3
SMAJ6.5	SMAJ6.5C	AH	WH	7.22	8.82	10	500	6.5	32.5	12.3
SMAJ6.5A	SMAJ6.5CA	AK	WK	7.22	7.98	10	500	6.5	35.7	11.2
SMAJ7.0	SMAJ7.0C	AL	WL	7.78	9.51	10	200	7.0	30.1	13.3
SMAJ7.0A	SMAJ7.0CA	AM	WM	7.78	8.60	10	200	7.0	33.3	12.0
SMAJ7.5	SMAJ7.5C	AN	WN	8.33	10.2	1	100	7.5	28.0	14.3
SMAJ7.5A	SMAJ7.5CA	AP	WP	8.33	9.21	1	100	7.5	31.0	12.9
SMAJ8.0	SMAJ8.0C	AQ	WQ	8.89	10.9	1	50	8.0	26.7	15.0
SMAJ8.0A	SMAJ8.0CA	AR	WR	8.89	9.83	1	50	8.0	29.4	13.6
SMAJ8.5	SMAJ8.5C	AS	WS	9.44	11.5	1	10	8.5	25.2	15.9
SMAJ8.5A	SMAJ8.5CA	AT	WT	9.44	10.4	1	10	8.5	27.8	14.4
SMAJ9.0	SMAJ9.0C	AU	WU	10.0	12.2	1	5.0	9.0	23.7	16.9
SMAJ9.0A	SMAJ9.0CA	AV	WV	10.0	11.1	1	5.0	9.0	26.0	15.4
SMAJ10	SMAJ10C	AW	WW	11.1	13.6	1	5.0	10	21.3	18.8
SMAJ10A	SMAJ10CA	AX	WX	11.1	12.3	1	5.0	10	23.5	17.0
SMAJ11	SMAJ11C	AY	WY	12.2	14.9	1	5.0	11	19.9	20.1
SMAJ11A	SMAJ11CA	AZ	WZ	12.2	13.5	1	5.0	11	22.0	18.2
SMAJ12	SMAJ12C	BD	XD	13.3	16.3	1	5.0	12	18.2	22.0
SMAJ12A	SMAJ12CA	BE	XE	13.3	14.7	1	5.0	12	20.1	19.9
SMAJ13	SMAJ13C	BF	XF	14.4	17.6	1	5.0	13	16.8	23.8
SMAJ13A	SMAJ13CA	BG	XG	14.4	15.9	1	5.0	13	18.6	21.5
SMAJ14	SMAJ14C	BH	XH	15.6	19.1	1	5.0	14	15.5	25.8
SMAJ14A	SMAJ14CA	BK	XK	15.6	17.2	1	5.0	14	17.2	23.2
SMAJ15	SMAJ15C	BL	XL	16.7	20.4	1	5.0	15	14.9	26.9
SMAJ15A	SMAJ15CA	BM	XM	16.7	18.5	1	5.0	15	16.4	24.4
SMAJ16	SMAJ16C	BN	XN	17.8	21.8	1	5.0	16	13.9	28.8
SMAJ16A	SMAJ16CA	BP	XP	17.8	19.7	1	5.0	16	15.4	26.0
SMAJ17	SMAJ17C	BQ	XQ	18.9	23.1	1	5.0	17	13.1	30.5
SMAJ17A	SMAJ17CA	BR	XR	18.9	20.9	1	5.0	17	14.5	27.6
SMAJ18	SMAJ18C	BS	XS	20.0	24.4	1	5.0	18	12.4	32.2
SMAJ18A	SMAJ18CA	BT	XT	20.0	22.1	1	5.0	18	13.7	29.2
SMAJ19	SMAJ19C	BA	XA	21.1	25.8	1	5.0	19	11.8	34.0
SMAJ19A	SMAJ19CA	BB	XB	21.1	23.3	1	5.0	19	13.0	30.8
SMAJ20	SMAJ20C	BU	XU	22.2	27.1	1	5.0	20	11.2	35.8
SMAJ20A	SMAJ20CA	BV	XV	22.2	24.5	1	5.0	20	12.3	32.4
SMAJ22	SMAJ22C	BW	XW	24.4	29.8	1	5.0	22	10.2	39.4
SMAJ22A	SMAJ22CA	BX	XX	24.4	26.9	1	5.0	22	11.3	35.5
SMAJ24	SMAJ24C	BY	XY	26.7	32.6	1	5.0	24	9.30	43.0
SMAJ24A	SMAJ24CA	BZ	XZ	26.7	29.5	1	5.0	24	10.3	38.9
SMAJ26	SMAJ26C	CD	YD	28.9	35.3	1	5.0	26	8.58	46.6
SMAJ26A	SMAJ26CA	CE	YE	28.9	31.9	1	5.0	26	9.50	42.1
SMAJ28	SMAJ28C	CF	YF	31.1	38.0	1	5.0	28	8.00	50.0
SMAJ28A	SMAJ28CA	CG	YG	31.1	34.4	1	5.0	28	8.81	45.4
SMAJ30	SMAJ30C	CH	YH	33.3	40.7	1	5.0	30	7.48	53.5
SMAJ30A	SMAJ30CA	CK	YK	33.3	36.8	1	5.0	30	8.26	48.4
SMAJ33	SMAJ33C	CL	YL	36.7	44.9	1	5.0	33	6.78	59.0
SMAJ33A	SMAJ33CA	CM	YM	36.7	40.6	1	5.0	33	7.50	53.3

SMAJ36	SMAJ36C	CN	YN	40.0	48.9	1	5.0	36	6.22	64.3
SMAJ36A	SMAJ36CA	CP	YP	40.0	44.2	1	5.0	36	6.88	58.1
SMAJ40	SMAJ40C	CQ	YQ	44.4	54.3	1	5.0	40	5.60	71.4
SMAJ40A	SMAJ40CA	CR	YR	44.4	49.1	1	5.0	40	6.20	64.5
SMAJ43	SMAJ43C	CS	YS	47.8	58.4	1	5.0	43	5.22	76.7
SMAJ43A	SMAJ43CA	CT	YT	47.8	52.8	1	5.0	43	5.76	69.4
SMAJ45	SMAJ45C	CU	YU	50.0	61.1	1	5.0	45	4.98	80.3
SMAJ45A	SMAJ45CA	CV	YV	50.0	55.3	1	5.0	45	5.50	72.7
SMAJ48	SMAJ48C	CW	YW	53.3	65.1	1	5.0	48	4.68	85.5
SMAJ48A	SMAJ48CA	CX	YX	53.3	58.9	1	5.0	48	5.17	77.4
SMAJ51	SMAJ51C	CY	YY	56.7	69.3	1	5.0	51	4.39	91.1
SMAJ51A	SMAJ51CA	CZ	YZ	56.7	62.7	1	5.0	51	4.85	82.4
SMAJ54	SMAJ54C	RD	ZD	60.0	73.3	1	5.0	54	4.15	96.3
SMAJ54A	SMAJ54CA	RE	ZE	60.0	66.3	1	5.0	54	4.59	87.1
SMAJ58	SMAJ58C	RF	ZF	64.4	78.7	1	5.0	58	3.88	103
SMAJ58A	SMAJ58CA	RG	ZG	64.4	71.2	1	5.0	58	4.27	93.6
SMAJ60	SMAJ60C	RH	ZH	66.7	81.5	1	5.0	60	3.74	107
SMAJ60A	SMAJ60CA	RK	ZK	66.7	73.7	1	5.0	60	4.13	96.8
SMAJ64	SMAJ64C	RL	ZL	71.1	86.9	1	5.0	64	3.51	114
SMAJ64A	SMAJ64CA	RM	ZM	71.1	78.6	1	5.0	64	3.88	103
SMAJ70	SMAJ70C	RN	ZN	77.8	95.1	1	5.0	70	3.20	125
SMAJ70A	SMAJ70CA	RP	ZP	77.8	86.0	1	5.0	70	3.54	113
SMAJ75	SMAJ75C	RQ	ZQ	83.3	102	1	5.0	75	2.99	134
SMAJ75A	SMAJ75CA	RR	ZR	83.3	92.1	1	5.0	75	3.31	121
SMAJ78	SMAJ78C	RS	ZS	86.7	106	1	5.0	78	2.88	139
SMAJ78A	SMAJ78CA	RT	ZT	86.7	95.8	1	5.0	78	3.17	126
SMAJ80	SMAJ80C	RA	ZA	89.0	109	1	5.0	80	2.79	143
SMAJ80A	SMAJ80CA	RB	ZB	88.8	97.6	1	5.0	80	3.09	130
SMAJ85	SMAJ85C	RU	ZU	94.4	115	1	5.0	85	2.65	151
SMAJ85A	SMAJ85CA	RV	ZV	94.4	104	1	5.0	85	2.92	137
SMAJ90	SMAJ90C	RW	ZW	100	122	1	5.0	90	2.50	160
SMAJ90A	SMAJ90CA	RX	ZX	100	111	1	5.0	90	2.74	146
SMAJ100	SMAJ100C	RY	ZY	111	136	1	5.0	100	2.23	179
SMAJ100A	SMAJ100CA	RZ	ZZ	111	123	1	5.0	100	2.47	162
SMAJ110	SMAJ110C	ā	VD	122	149	1	5.0	110	2.04	196
SMAJ110A	SMAJ110CA	SE	VE	122	135	1	5.0	110	2.26	177
SMAJ120	SMAJ120C	SF	VF	133	163	1	5.0	120	1.87	214
SMAJ120A	SMAJ120CA	SG	VG	133	147	1	5.0	120	2.07	193
SMAJ130	SMAJ130C	SH	VH	144	176	1	5.0	130	1.73	231
SMAJ130A	SMAJ130CA	SK	VK	144	159	1	5.0	130	1.91	209
SMAJ140	SMAJ140C	SA	VA	156	190	1	5.0	140	1.60	251
SMAJ140A	SMAJ140CA	SB	VB	155	171	1	5.0	140	1.76	227
SMAJ150	SMAJ150C	SL	VL	167	204	1	5.0	150	1.49	268
SMAJ150A	SMAJ150CA	SM	VM	167	185	1	5.0	150	1.65	243
SMAJ160	SMAJ160C	SN	VN	178	218	1	5.0	160	1.39	287
SMAJ160A	SMAJ160CA	SP	VP	178	197	1	5.0	160	1.54	259
SMAJ170	SMAJ170C	SQ	VQ	189	231	1	5.0	170	1.32	304
SMAJ170A	SMAJ170CA	SR	VR	189	209	1	5.0	170	1.45	275
SMAJ180	SMAJ180C	SS	VS	200	245	1	5.0	180	1.24	322
SMAJ180A	SMAJ180CA	ST	VT	200	220	1	5.0	180	1.37	292
SMAJ190	SMAJ190C	SU	VU	211	258	1	5.0	190	1.18	340
SMAJ190A	SMAJ190CA	SV	VV	211	232	1	5.0	190	1.30	308

Note:

1. Suffix 'A ' denotes 5% tolerance device. Without 'A' denotes 10% tolerance device.
2. Add suffix 'C 'or ' CA ' after part number to specify Bi-directional devices.
3. For Bi-Directional devices having VR of 10 volts and under, the IR limit is double .