



P6SMBJ SERIES

Glass Passivated Unidirectional and Bidirectional Transient Voltage Suppressors

Peak Pulse Power 600 Watts Reverse Voltage 6.8 to 220 Volts


Features

- Glass passivated chip
- 600W peak pulse power capability with a 10/1000 μ s waveform, repetitive rate(duty cycle):0.01%
- Low leakage
- Uni and Bidirectional unit
- Excellent clamping capability
- Very fast response time

Mechanical Data

- Case: Molded plastic
- Epoxy: UL 94V-0 rate flame retardant
- Lead: Solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes cathode end except Bipolar
- Mounting position: Any

SMB/DO-214AA

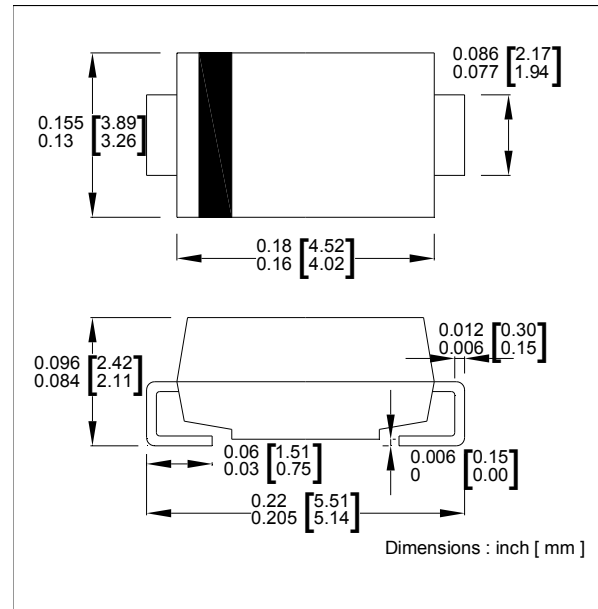

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Parameter	Symbol	Value	Unit
Peak Power dissipation with a 10/100 μ S waveform	P_{PP}	Minimum 600	Watts
Peak pulse current with a 10/1000 μ s waveform	I_{PP}	See Next Table	Amps
Power dissipation on infinite heatsink at $T_L=75^\circ\text{C}$	P_D	5.0	Watts
Peak forward surge current, 8.3ms single half sine-wave unidirectional only ⁽¹⁾	I_{FSM}	100	Amps
Maximum instantaneous forward voltage at 25A for unidirectional only ⁽²⁾	V_F	3.5/5.0	Volts
Operating junction and storage temperature range	T_J, T_{STG}	-55 to +150	$^\circ\text{C}$

Note:

(1) Measured on 8.3 ms single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minute maximum.

(2) $V_F= 3.5\text{V}$ on SMBJ5.0 thru SMBJ90A devices and $V_F= 5.0\text{V}$ on SMBJ100 thru SMBJ190A devices.

RATING AND CHARACTERISTIC CURVES

Fig. 1 - Pulse Derating Curve

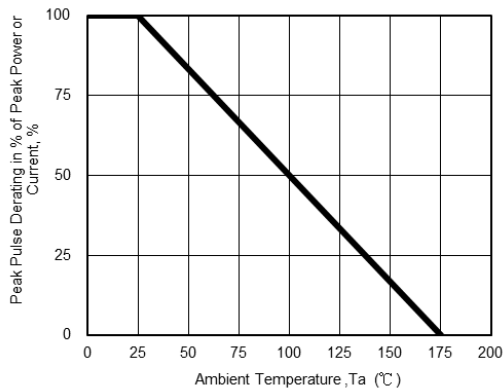


Fig. 2 - Maximum Non-Repetitive

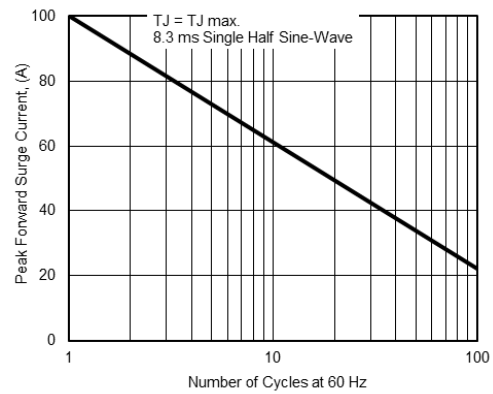


Fig. 3 - Steady State Power Derating Curve

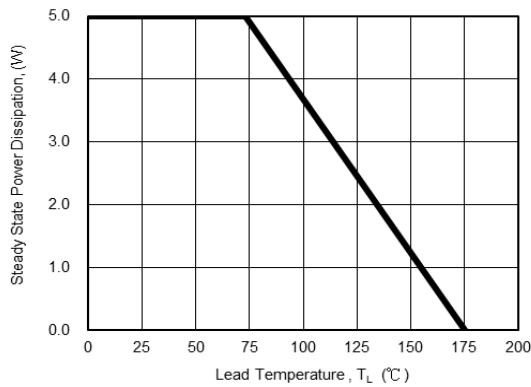


Fig. 4 - Peak Pulse Power Rating Curve


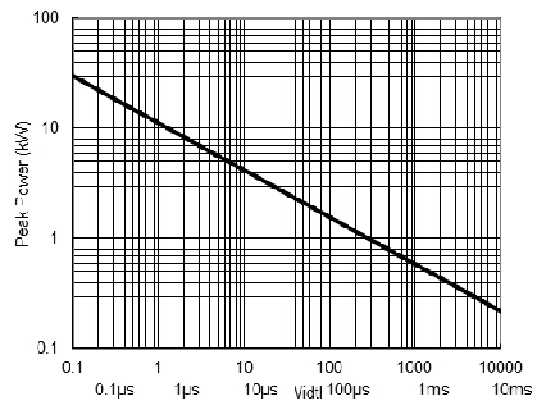


Fig. 5 - Pulse Waveform

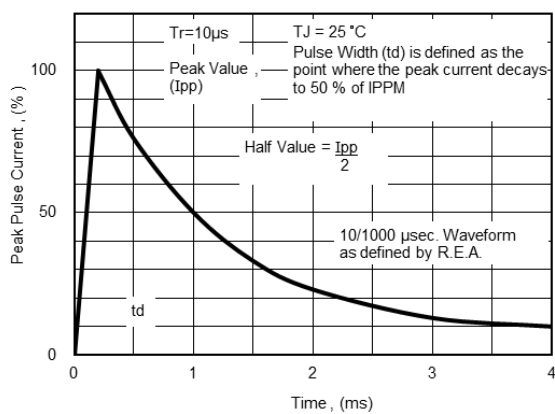

LIFANG ELECTRONICS P6SMBJ SERIES		Device Marking Code		Breakdown voltage VBR @ IT			Maximum Reverse Leakage IR(μA) @VRWM	Working PeakReverse Voltage VRWM (Volts)	Maximum Reverse Surge Current Ipp(A) @10x1000us sinewave	Maximum Clamping Voltage Vc (Volts) @Ipp
		Uni	Bi	Min (V)	Max (V)	IT (mA)				
Uni-polar	Bi-polar	Uni	Bi	Min (V)	Max (V)	IT (mA)				
SMBJ5.0	SMBJ5.0C	KD	AD	6.40	7.30	10	800	5.0	62.5	9.6
SMBJ5.0A	SMBJ5.0CA	KE	AE	6.40	7.00	10	800	5.0	65.2	9.2
SMBJ6.0	SMBJ6.0C	KF	AF	6.67	8.15	10	800	6.0	52.6	11.4
SMBJ6.0A	SMBJ6.0CA	KG	AG	6.67	7.37	10	800	6.0	58.3	10.3
SMBJ6.5	SMBJ6.5C	KH	AH	7.22	8.82	10	500	6.5	48.8	12.3
SMBJ6.5A	SMBJ6.5CA	KK	AK	7.22	7.98	10	500	6.5	53.6	11.2
SMBJ7.0	SMBJ7.0C	KL	AL	7.78	9.51	10	200	7.0	45.1	13.3
SMBJ7.0A	SMBJ7.0CA	KM	AM	7.78	8.60	10	200	7.0	50.0	12.0
SMBJ7.5	SMBJ7.5C	KN	AN	8.33	10.2	1	100	7.5	42.0	14.3
SMBJ7.5A	SMBJ7.5CA	KP	AP	8.33	9.21	1	100	7.5	46.5	12.9
SMBJ8.0	SMBJ8.0C	KQ	AQ	8.89	10.9	1	50	8.0	40.0	15.0
SMBJ8.0A	SMBJ8.0CA	KR	AR	8.89	9.83	1	50	8.0	44.1	13.6
SMBJ8.5	SMBJ8.5C	KS	AS	9.44	11.5	1	10	8.5	37.7	15.9
SMBJ8.5A	SMBJ8.5CA	KT	AT	9.44	10.4	1	10	8.5	41.7	14.4
SMBJ9.0	SMBJ9.0C	KU	AU	10.0	12.2	1	5.0	9.0	35.5	16.9
SMBJ9.0A	SMBJ9.0CA	KV	AV	10.0	11.1	1	5.0	9.0	39.0	15.4
SMBJ10	SMBJ10C	KW	AW	11.1	13.6	1	5.0	10	31.9	18.8
SMBJ10A	SMBJ10CA	KX	AX	11.1	12.3	1	5.0	10	35.3	17.0
SMBJ11	SMBJ11C	KY	AY	12.2	14.9	1	5.0	11	29.9	20.1
SMBJ11A	SMBJ11CA	KZ	AZ	12.2	13.5	1	5.0	11	33.0	18.2
SMBJ12	SMBJ12C	LD	BD	13.3	16.3	1	5.0	12	27.3	22.0
SMBJ12A	SMBJ12CA	LE	BE	13.3	14.7	1	5.0	12	30.2	19.9
SMBJ13	SMBJ13C	LF	BF	14.4	17.6	1	5.0	13	25.2	23.8
SMBJ13A	SMBJ13CA	LG	BG	14.4	15.9	1	5.0	13	27.9	21.5
SMBJ14	SMBJ14C	LH	BH	15.6	19.1	1	5.0	14	23.3	25.8
SMBJ14A	SMBJ14CA	LK	BK	15.6	17.2	1	5.0	14	25.9	23.2
SMBJ15	SMBJ15C	LL	BL	16.7	20.4	1	5.0	15	22.3	26.9
SMBJ15A	SMBJ15CA	LM	BM	16.7	18.5	1	5.0	15	24.6	24.4
SMBJ16	SMBJ16C	LN	BN	17.8	21.8	1	5.0	16	20.8	28.8
SMBJ16A	SMBJ16CA	LP	BP	17.8	19.7	1	5.0	16	23.1	26.0
SMBJ17	SMBJ17C	LQ	BQ	18.9	23.1	1	5.0	17	19.7	30.5
SMBJ17A	SMBJ17CA	LR	BR	18.9	20.9	1	5.0	17	21.7	27.6
SMBJ18	SMBJ18C	LS	BS	20.0	24.4	1	5.0	18	18.6	32.2
SMBJ18A	SMBJ18CA	LT	BT	20.0	22.1	1	5.0	18	20.5	29.2
SMBJ19	SMBJ19C	LA	BA	21.1	25.8	1	5.0	19	17.6	34.0
SMBJ19A	SMBJ19CA	LB	BB	21.1	23.3	1	5.0	19	19.5	30.8
SMBJ20	SMBJ20C	LU	BU	22.2	27.1	1	5.0	20	16.8	35.8
SMBJ20A	SMBJ20CA	LV	BV	22.2	24.5	1	5.0	20	18.5	32.4
SMBJ22	SMBJ22C	LW	BW	24.4	29.8	1	5.0	22	15.2	39.4
SMBJ22A	SMBJ22CA	LX	BX	24.4	26.9	1	5.0	22	16.9	35.5
SMBJ24	SMBJ24C	LY	BY	26.7	32.6	1	5.0	24	14.0	43.0
SMBJ24A	SMBJ24CA	LZ	BZ	26.7	29.5	1	5.0	24	15.4	38.9
SMBJ26	SMBJ26C	MD	CD	28.9	35.3	1	5.0	26	12.9	46.6
SMBJ26A	SMBJ26CA	ME	CE	28.9	31.9	1	5.0	26	14.3	42.1
SMBJ28	SMBJ28C	MF	CF	31.1	38.0	1	5.0	28	12.0	50.0
SMBJ28A	SMBJ28CA	MG	CG	31.1	34.4	1	5.0	28	13.2	45.4
SMBJ30	SMBJ30C	MH	CH	33.3	40.7	1	5.0	30	11.2	53.5
SMBJ30A	SMBJ30CA	MK	CK	33.3	36.8	1	5.0	30	12.4	48.4
SMBJ33	SMBJ33C	ML	CL	36.7	44.9	1	5.0	33	10.2	59.0
SMBJ33A	SMBJ33CA	MM	CM	36.7	40.6	1	5.0	33	11.3	53.3

SMBJ36	SMBJ36C	MN	CN	40.0	48.9	1	5.0	36	9.33	64.3
SMBJ36A	SMBJ36CA	MP	CP	40.0	44.2	1	5.0	36	10.3	58.1
SMBJ40	SMBJ40C	MQ	CQ	44.4	54.3	1	5.0	40	8.40	71.4
SMBJ40A	SMBJ40CA	MR	CR	44.4	49.1	1	5.0	40	9.30	64.5
SMBJ43	SMBJ43C	MS	CS	47.8	58.4	1	5.0	43	7.82	76.7
SMBJ43A	SMBJ43CA	MT	CT	47.8	52.8	1	5.0	43	8.65	69.4
SMBJ45	SMBJ45C	MU	CU	50.0	61.1	1	5.0	45	7.47	80.3
SMBJ45A	SMBJ45CA	MV	CV	50.0	55.3	1	5.0	45	8.25	72.7
SMBJ48	SMBJ48C	MW	CW	53.3	65.1	1	5.0	48	7.02	85.5
SMBJ48A	SMBJ48CA	MX	CX	53.3	58.9	1	5.0	48	7.75	77.4
SMBJ51	SMBJ51C	MY	CY	56.7	69.3	1	5.0	51	6.59	91.1
SMBJ51A	SMBJ51CA	MZ	CZ	56.7	62.7	1	5.0	51	7.28	82.4
SMBJ54	SMBJ54C	ND	DD	60.0	73.3	1	5.0	54	6.23	96.3
SMBJ54A	SMBJ54CA	NE	DE	60.0	66.3	1	5.0	54	6.89	87.1
SMBJ58	SMBJ58C	NF	DF	64.4	78.7	1	5.0	58	5.83	103
SMBJ58A	SMBJ58CA	NG	DG	64.4	71.2	1	5.0	58	6.41	93.6
SMBJ60	SMBJ60C	NH	DH	66.7	81.5	1	5.0	60	5.61	107
SMBJ60A	SMBJ60CA	NK	DK	66.7	73.7	1	5.0	60	6.20	96.8
SMBJ64	SMBJ64C	NL	DL	71.1	86.9	1	5.0	64	5.26	114
SMBJ64A	SMBJ64CA	NM	DM	71.1	78.6	1	5.0	64	5.83	103
SMBJ70	SMBJ70C	NN	DN	77.8	95.1	1	5.0	70	4.80	125
SMBJ70A	SMBJ70CA	NP	DP	77.8	86.0	1	5.0	70	5.31	113
SMBJ75	SMBJ75C	NQ	DQ	83.3	102	1	5.0	75	4.48	134
SMBJ75A	SMBJ75CA	NR	DR	83.3	92.1	1	5.0	75	4.96	121
SMBJ78	SMBJ78C	NS	DS	86.7	106	1	5.0	78	4.32	139
SMBJ78A	SMBJ78CA	NT	DT	86.7	95.8	1	5.0	78	4.76	126
SMBJ80	SMBJ80C	NA	DA	89.0	109	1	5.0	80	4.19	143
SMBJ80A	SMBJ80CA	NB	DB	88.8	97.6	1	5.0	80	4.63	130
SMBJ85	SMBJ85C	NU	DU	94.4	115	1	5.0	85	3.97	151
SMBJ85A	SMBJ85CA	NV	DV	94.4	104	1	5.0	85	4.38	137
SMBJ90	SMBJ90C	NW	DW	100	122	1	5.0	90	3.75	160
SMBJ90A	SMBJ90CA	NX	DX	100	111	1	5.0	90	4.11	146
SMBJ100	SMBJ100C	NY	DY	111	136	1	5.0	100	3.35	179
SMBJ100A	SMBJ100CA	NZ	DZ	111	123	1	5.0	100	3.70	162
SMBJ110	SMBJ110C	PD	ED	122	149	1	5.0	110	3.06	196
SMBJ110A	SMBJ110CA	PE	EE	122	135	1	5.0	110	3.39	177
SMBJ120	SMBJ120C	PF	EF	133	163	1	5.0	120	2.80	214
SMBJ120A	SMBJ120CA	PG	EG	133	147	1	5.0	120	3.11	193
SMBJ130	SMBJ130C	PH	EH	144	176	1	5.0	130	2.60	231
SMBJ130A	SMBJ130CA	PK	EK	144	159	1	5.0	130	2.87	209
SMBJ140	SMBJ140C	PA	EA	156	190	1	5.0	140	2.39	251
SMBJ140A	SMBJ140CA	PB	EB	155	171	1	5.0	140	2.65	227
SMBJ150	SMBJ150C	PL	EL	167	204	1	5.0	150	2.24	268
SMBJ150A	SMBJ150CA	PM	EM	167	185	1	5.0	150	2.47	243
SMBJ160	SMBJ160C	PN	EN	178	218	1	5.0	160	2.09	287
SMBJ160A	SMBJ160CA	PP	EP	178	197	1	5.0	160	2.32	259
SMBJ170	SMBJ170C	PQ	EQ	189	231	1	5.0	170	1.97	304
SMBJ170A	SMBJ170CA	PR	ER	189	209	1	5.0	170	2.18	275
SMBJ180	SMBJ180C	PS	ES	200	245	1	5.0	180	1.86	322
SMBJ180A	SMBJ180CA	PT	ET	200	220	1	5.0	180	2.06	292
SMBJ190	SMBJ190C	PU	EU	211	258	1	5.0	190	1.76	340
SMBJ190A	SMBJ190CA	PV	EV	211	232	1	5.0	190	1.95	308

Note:

1. Suffix 'A ' denotes 5% tolerance device. Without 'A' denotes 10% tolerance device.
2. Add suffix 'C 'or ' CA ' after part number to specify Bi-directional devices.
3. For Bi-Directional devices having VR of 10 volts and under, the IR limit is double .