




SB1602CT THRU SB1620CT

16 AMPERS SCHOTTKY BARRIER RECTIFIERS

Reverse Voltage - 20 to 200 Volts Forward Current - 16.0 Ampere

TO-220AB

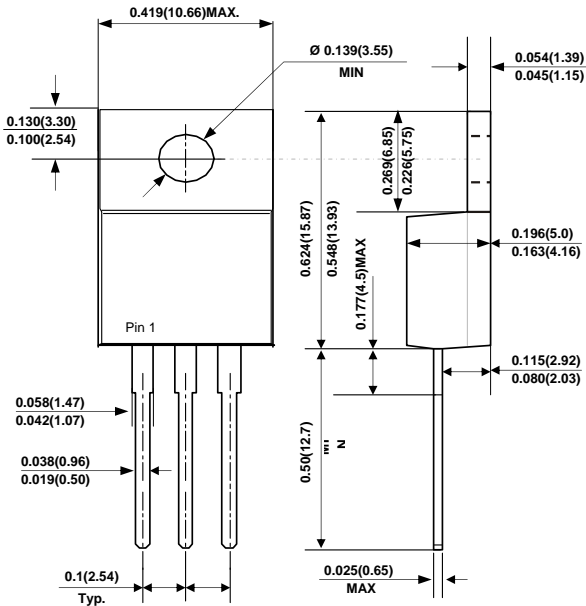

Dimensions in inches and (millimeters)

FEATURES

- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0 utilizing Flame Retardant Epoxy Molding Compound.
- ◆ Exceeds environmental standards of MIL-S-19500/228
- ◆ Low forward voltage, high current capability
- ◆ Low power loss, high efficiency.
- ◆ High surge capacity.
- ◆ For use in low voltage, high frequency inverters free wheeling, and polarity protection applications.
- ◆ In compliance with EU RoHS 2002/95/EC directives

MECHANICAL DATA

Case: JEDEC TO-220AB, Molded plastic package

Terminals: Solderable per MIL-STD-750 · Method 2026

Approx. Weight: 0.0655 ounces, 1.859 grams.

Standard Packaging : Tube

Mounting Position: Any.

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

PARAMETER	SYMBOLS	SB 1602CT	SB 1603CT	SB 1604CT	SB 16045CT	SB 1606CT	SB 1608CT	SB 1610CT	SB 1615CT	SB 1620CT	UNITS
Maximum repetitive peak reverse voltage	V_{RRM}	20	30	40	45	60	80	100	150	200	Volts
Maximum RMS voltage	V_{RMS}	14	21	28	31.5	42	56	70	105	140	Volts
Minimum Reverse Breakdown Voltage	V_R	20	30	40	45	60	80	100	150	200	Volts
Average Rectified current	$I_{(AV)}$	16.0									Amp
Non-repetitive Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	150									Amps
Maximum Forward Voltage at $I_F=8.0A$ per leg	V_F	0.55			0.75	0.85	0.92			Volts	
Reverse Leakage Current at V_{RRM}	I_R	0.5									mA
Typical Thermal Resistance	$R_{\theta JA}$	2.0									°C/W
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 to +150			-65 to +175						°C

Note: Both Bonding and Chip structure are available



SB1602CT THRU SB1620CT

RATINGS AND CHARACTERISTIC CURVES

FIG. 1- FORWARD CURRENT DERATING CURVE

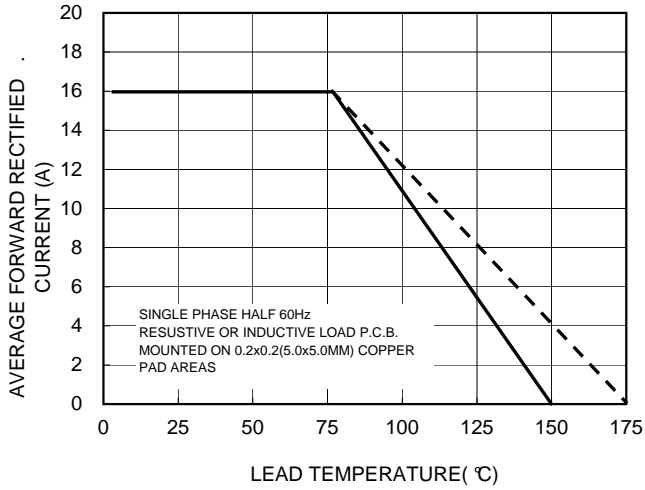


FIG. 2-TYPICAL FORWARD SURGE CHARACTERISTICS

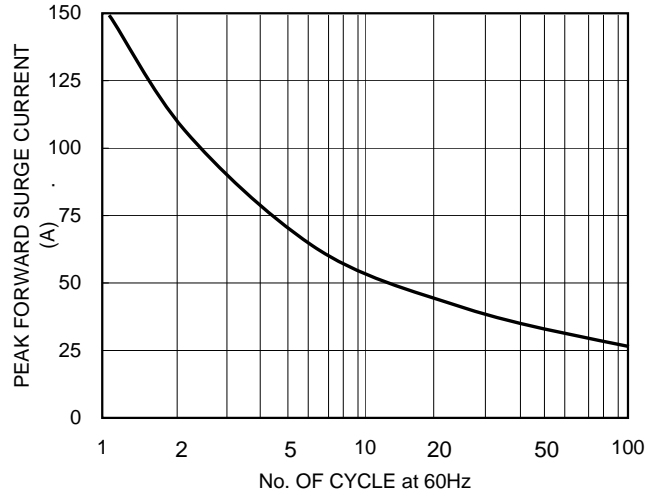


FIG. 3-TYPICAL REVERSE CHARACTERISTICS

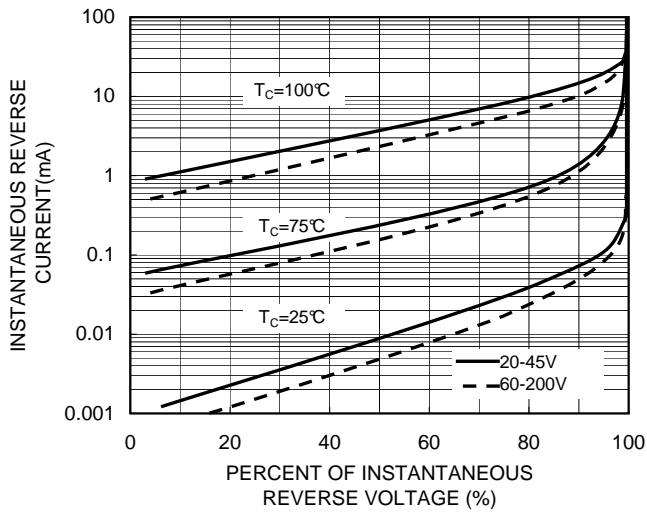


FIG. 4-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

