

*1N494X SERIES*

**FAST RECOVERY RECTIFIER**

产

品

规

确

格

认

书

# 1N4942 THRU 1N4948

## FAST RECOVERY RECTIFIER

**REVERSE VOLTAGE:** 200 to 1000 VOLTS

**FORWARD CURRENT:** 1.0 AMPERE

### FEATURES

- High surge current capability
- 1.0 ampere operation at  $T_A=55^\circ C$  with no thermal runaway.
- Void-free Plastic in a DO-41 package.
- Fast switching for high efficiency
- Exceeds environmental standards of MIL-S-19500/228
- Low leakage.

### MECHANICAL DATA

Case: Molded plastic, DO-41

Epoxy: UL 94V-O rate flame retardant

Lead: Axial leads, solderable per MIL-STD-202, method 208 guaranteed


Polarity: Color band denotes cathode end

Mounting position: Any

Weight: 0.012ounce, 0.33gram



康比電子  
HORNBY ELECTRONIC

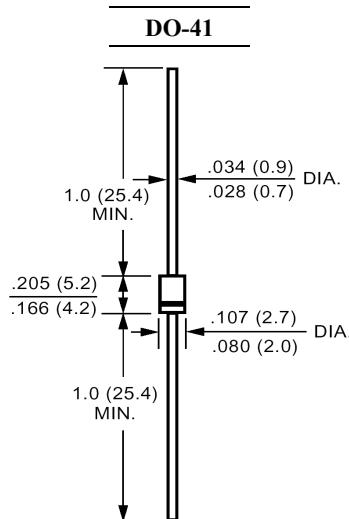

Dimensions in inches and (millimeters)

### Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

	Symbols	1N4942	1N4944	1N4946	1N4947	1N4948	Units
<b>Maximum Recurrent Peak Reverse Voltage</b>	$V_{RRM}$	200	400	600	800	1000	Volts
<b>Maximum RMS Voltage</b>	$V_{RMS}$	140	280	420	560	700	Volts
<b>Maximum DC Blocking Voltage</b>	$V_{DC}$	200	400	600	800	1000	Volts
<b>Maximum Average Forward Rectified Current .375"(9.5mm) Lead Length at <math>T_A=55^\circ C</math></b>	$I_{(AV)}$			1.0			Amp
<b>Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)</b>	$I_{FSM}$			30			Amp
<b>Maximum Forward Voltage at 1.0A DC and 25°C</b>	$V_F$			1.3			Volts
<b>Maximum Reverse Current at <math>T_A=25^\circ C</math> at Rated DC Blocking Voltage <math>T_A=100^\circ C</math></b>	$I_R$			5.0			uAmp
				500			
<b>Typical Junction Capacitance (Note 1)</b>	$C_J$			12			pF
<b>Typical Thermal Resistance (Note 2)</b>	$R_{\theta JA}$			50			/W
<b>Maximum Reverse Recovery Time (Note 3)</b>	$T_{RR}$	150	250		500		nS
<b>Operating and Storage Temperature Range</b>	$T_J, T_{stg}$			-55 to +150			

### NOTES:

1- Measured at 1 MHz and applied reverse voltage of 4.0 VDC.

2- Thermal Resistance From Junction to Ambient 0.375"(9.5mm) lead length P.C.B. Mounted.

3- Reverse Recovery Test Conditions :  $I_F=.5A$ ,  $I_R=1A$ ,  $I_{RR}=.25A$ .

# 1N4942 THRU 1N4948

## FAST RECOVERY RECTIFIER



康比電子  
HORNBY ELECTRONIC

### RATINGS AND CHARACTERISTIC CURVES

FIG.1- MAXIMUM TYPICAL FORWARD CURRENT DERATING CURVE

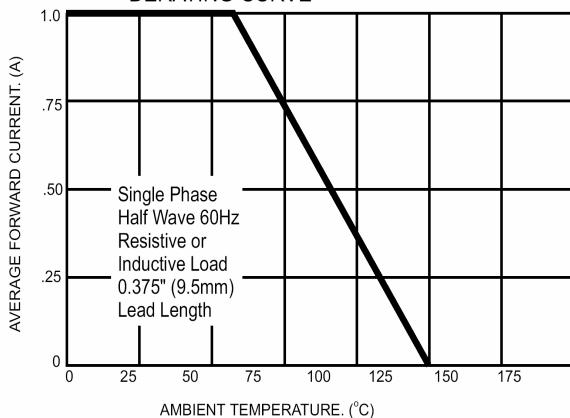


FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

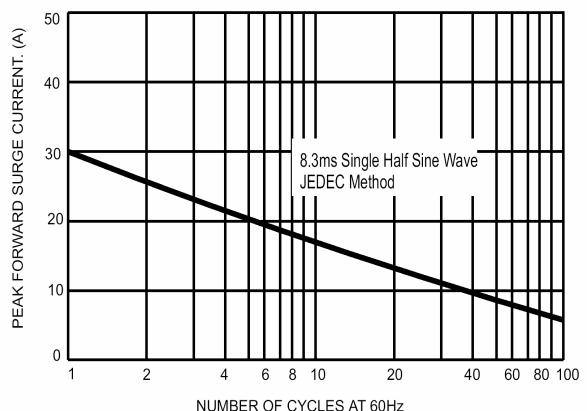


FIG.3- TYPICAL FORWARD CHARACTERISTICS

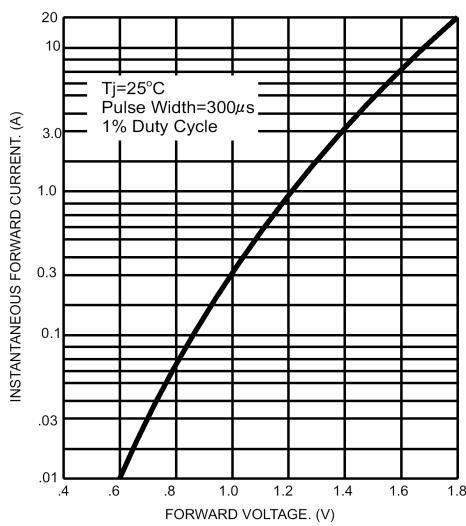


FIG.4- TYPICAL JUNCTION CAPACITANCE

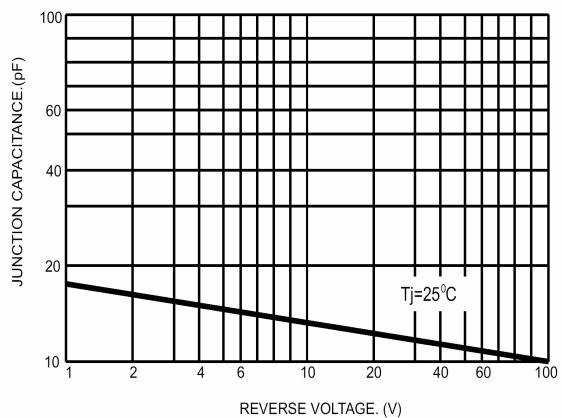


FIG.5- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

