




# DF15005S thru DF1510S

Miniature Glass Passivated Single-Phase Surface Mount Bridge Rectifiers  
Voltage Range 50 to 1000 Volts      Forward Current 1.5 Amperes

## Features


- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ Glass passivated chip junctions
- ◆ High surge overload rating of 50 Amperes peak
- ◆ Ideal for printed circuit boards



DFS

## Mechanical Data

- ◆ Case: Molded plastic body over passivated junctions
- ◆ Terminals: Plated leads solderable per MIL-STD-750, Method 2026
- ◆ High temperature soldering guaranteed: 260°C/10 seconds at 5 lbs. (2.3kg) tension
- ◆ Polarity: Polarity symbols marked on body
- ◆ Mounting Position: Any
- ◆ Weight: 0.014oz., 0.38g

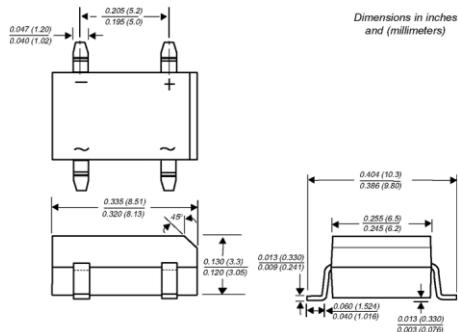

## Maximum Ratings and Electrical Characteristics

(T<sub>A</sub>=25°C unless otherwise noted)


Parameter	Symbols	DF 15005S	DF 1501S	DF 1502S	DF 1504S	DF 1506S	DF 1508S	DF 1510S	Units
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	Volts
Maximum RMS voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	Volts
Maximum average forward output rectified current at T <sub>A</sub> =40°C <sup>(2)</sup>	I <sub>F(AV)</sub>					1.5			Amps
Peak forward surge current single half sine-wave superimposed on rated load (JEDEC Method) T <sub>J</sub> =150°C	I <sub>FSM</sub>				50.0				Amps
Rating for fusing (t < 8.3ms)	Pt				10				A <sup>2</sup> sec
Max. instantaneous forward voltage drop per leg at 1.5A	V <sub>F</sub>				1.1				Volts
Maximum DC reverse current T <sub>A</sub> =25°C at rated DC blocking voltage per leg T <sub>A</sub> =125°C	I <sub>R</sub>				5.0 500				uA
Typical junction capacitance per leg <sup>(1)</sup>	C <sub>J</sub>				25				pF
Typical thermal resistance per leg <sup>(2)</sup>	R <sub>θJA</sub> R <sub>θBL</sub>				40 15				°C/W
Operating junction and storage temperature range	T <sub>J</sub> , T <sub>STG</sub>				-55 to +150				°C

**Notes:** 1. Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts  
2. Units mounted on P.C.B. with 0.51 x 0.51" (13 x 13mm) copper pads


## RATINGS AND CHARACTERISTIC CURVES

( $T_A = 25^\circ\text{C}$  unless otherwise noted)


**Fig. 1 - Derating Curve Output Rectified Current**

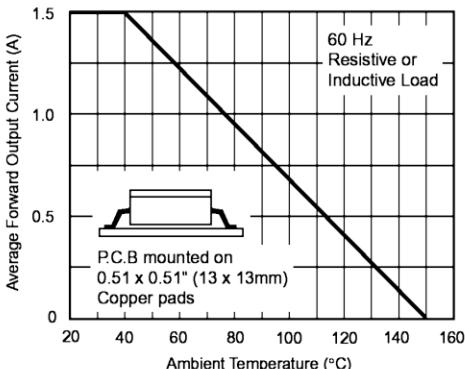


**Fig. 3 - Typical Forward Characteristics Per Leg**

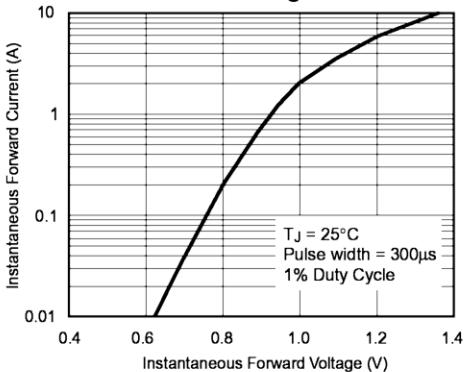


**Fig. 5 - Typical Junction Capacitance Per Leg**

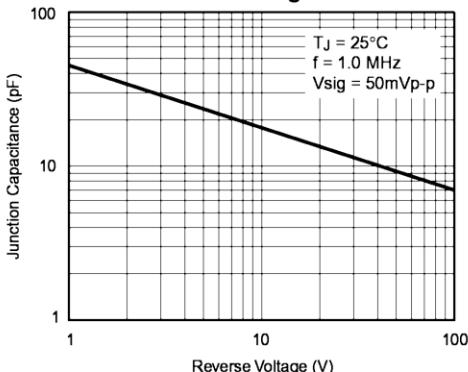

**Fig. 2 - Maximum Non-Repetitive Peak Forward Surge Current Per Leg**

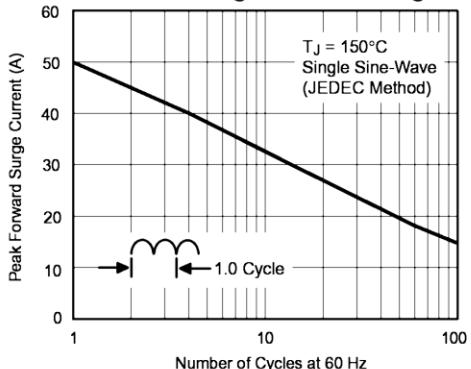

**Fig. 4 - Typical Reverse Leakage Characteristics Per Leg**

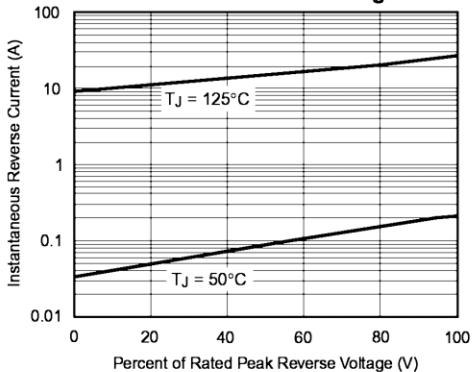

**Fig. 6 - Typical Transient Thermal Impedance**

