

# ***GBU60X SERIES***

**GLASS PASSIVATED SINGLE-PHASE BRIDGE RECTIFIER**

产  
品  
规  
格  
确  
认  
书

# GBU6005 THRU GBU610

## GLASS PASSIVATED SINGLE-PHASE BRIDGE RECTIFIER

**REVERSE VOLTAGE:** 50 to 1000 VOLTS

**FORWARD CURRENT:** 6.0 AMPERE



康比電子  
HORNBY ELECTRONIC

### FEATURES

- Glass passivated chip junction
- Reliable low cost construction utilizing molded plastic technique
- Ideal for printed circuit board
- Low forward voltage drop
- Low reverse leakage current
- High surge current capability

### MECHANICAL DATA


Case: Molded plastic, GBU

Epoxy: UL 94V-O rate flame retardant

Terminals: Leads solderable per MIL-STD-202, method 208 guaranteed

Mounting position: Any

Weight: 0.15ounce, 4.0gram

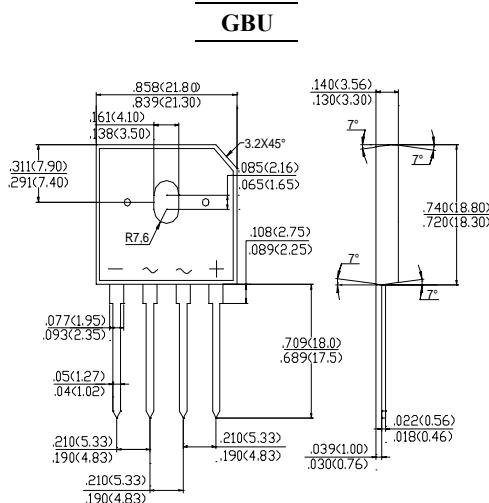

Dimensions in inches and (millimeters)

### Maximum Ratings and Electrical Characteristics

Ratings at 25° ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

	Symbols	GBU6005	GBU601	GBU602	GBU604	GBU606	GBU608	GBU610	Units
<b>Maximum Recurrent Peak Reverse Voltage</b>	V <sub>RRM</sub>	50	100	200	400	600	800	1000	Volts
<b>Maximum RMS Voltage</b>	V <sub>RMS</sub>	35	70	140	280	420	560	700	Volts
<b>Maximum DC Blocking Voltage</b>	V <sub>DC</sub>	50	100	200	400	600	800	1000	Volts
<b>Maximum Average Forward Rectified Current at T<sub>C</sub>=100°C (Note 1),(Note 2)</b>	I <sub>(AV)</sub>					6.0			Amp
<b>Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)</b>	I <sub>FSM</sub>				175				Amp
<b>Maximum Forward Voltage at 6.0A DC and 25°C</b>	V <sub>F</sub>				1.0				Volts
<b>Maximum Reverse Current at T<sub>A</sub>=25°C at Rated DC Blocking Voltage T<sub>A</sub>=125°C</b>	I <sub>R</sub>				5.0				uAmp
					500				
<b>Typical Junction Capacitance (Note 3)</b>	C <sub>J</sub>		210			94			pF
<b>Typical Thermal Resistance (Note 1),(Note 2)</b>	R <sub>θJA</sub>			7.4					/W
<b>Typical Thermal Resistance (Note 1),(Note 2)</b>	R <sub>θJC</sub>			2.2					/W
<b>Operating and Storage Temperature Range</b>	T <sub>J</sub> , T <sub>Stg</sub>			-55 to +150					

### NOTES:

1- Units case mounted on 2.6 x 1.4 x 0.06" thick (6.5 x 3.5 x 0.15 cm) Al. Plate heatsink

2- Recommended mounting position is to bolt down on heatsink with silicone thermal compound for maximum heat transfer with #6 screws

3- Measured at 1 MHz and applied reverse voltage of 4.0 VDC.

# GBU6005 THRU GBU610


**GLASS PASSIVATED SINGLE-PHASE BRIDGE RECTIFIER**




康比電子  
HORNY ELECTRONIC

## RATINGS AND CHARACTERISTIC CURVES


**Fig. 1 – Derating Curve  
Output Rectified Current**

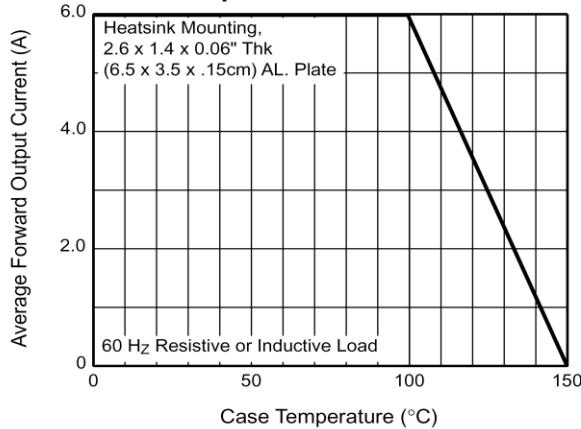


**Fig. 2 – Maximum Non-Repetitive Peak  
Forward Surge Current Per Leg**

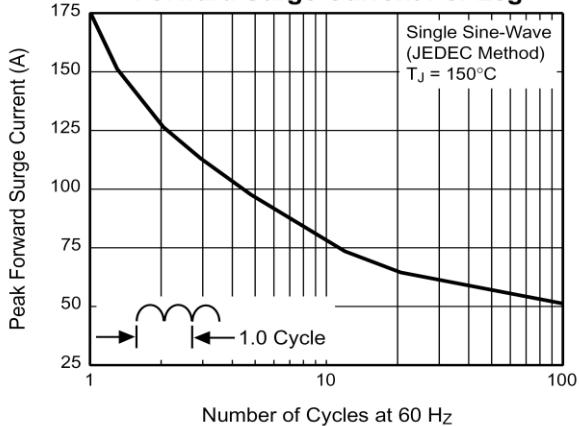


**Fig. 3 – Typical Forward  
Characteristics Per Leg**

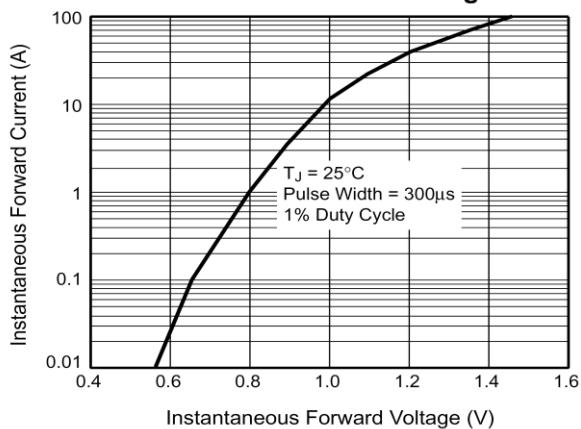

**Fig. 4 – Typical Reverse Leakage  
Characteristics Per Leg**

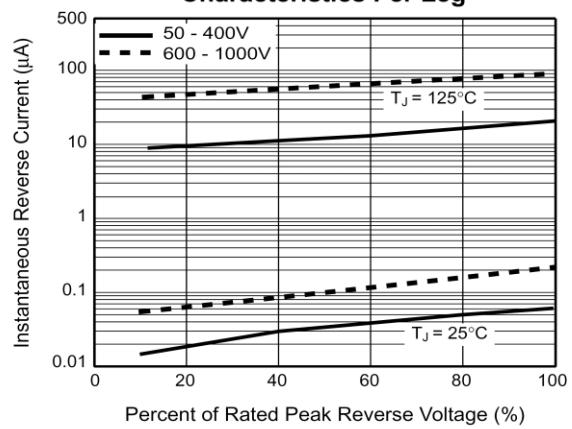

**Fig. 5 – Typical Junction  
Capacitance Per Leg**

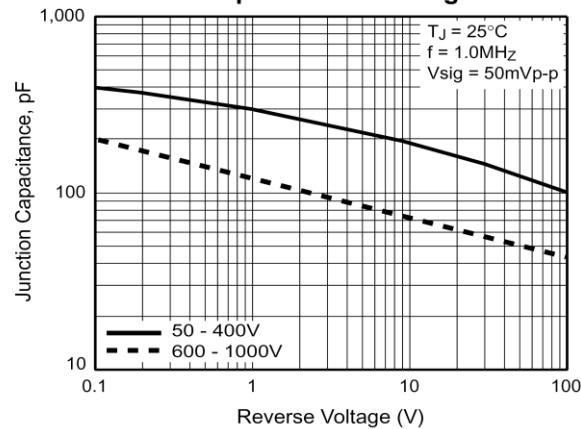

**Fig. 6 – Typical Transient  
Thermal Impedance**

