



# MB2M thru MB6M

Miniature Glass Passivated Single-Phase Bridge Rectifiers  
Voltage Range 200 to 600 Volts Forward Current 0.5 Ampere

## Features


- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ Glass passivated chip junctions
- ◆ High surge overload rating: 35A peak
- ◆ Saves space on printed circuit boards
- ◆ Recommended for non-automotive applications



**MBM**

## Mechanical Data

- ◆ Case: Molded plastic body over passivated junctions
- ◆ Terminals: Plated leads solderable per MIL-STD-750, Method 2026
- ◆ Mounting Position: Any
- ◆ Weight: 0.078 oz., 0.22 g

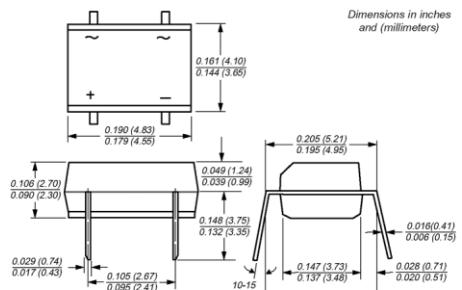

## Maximum Ratings and Electrical Characteristics

(T<sub>A</sub>=25°C unless otherwise noted)

Parameter	Symbols	MB2M	MB4M	MB6M	Units
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	200	400	600	Volts
Maximum RMS voltage	V <sub>RMS</sub>	140	280	420	Volts
Maximum DC blocking voltage	V <sub>DC</sub>	200	400	600	Volts
Maximum average forward output rectified current (see Fig.1) on glass-epoxy P.C.B. on aluminum substrate	I <sub>F(AV)</sub>		0.5 <sup>(1)</sup> 0.8 <sup>(2)</sup>		Amp
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>		35.0		Amps
Rating for fusing (t < 8.3ms)	I <sub>f</sub>		5.0		A <sup>2</sup> sec
Maximum instantaneous forward voltage drop per leg at 0.4A	V <sub>F</sub>		1.0		Volt
Maximum DC reverse current at rated DC blocking voltage per leg	I <sub>R</sub>	T <sub>A</sub> = 25°C T <sub>A</sub> = 125°C	5.0 100		uA
Typical thermal resistance per leg	R <sub>ThJA</sub> R <sub>ThUA</sub> R <sub>ThLL</sub>		85 <sup>(1)</sup> 70 <sup>(2)</sup> 20 <sup>(1)</sup>		°C/W
Typical junction capacitance per leg <sup>(3)</sup>	C <sub>J</sub>		13		pF
Operating junction and storage temperature range	T <sub>J</sub> , T <sub>STG</sub>		-55 to +150		°C

**Notes:** 1. On glass epoxy P.C.B. mounted on 0.05 x 0.05" (1.3 x 1.3mm) pads


2. On aluminum substrate P.C.B. with an area of 0.8" x 0.8" (20 x 20mm) mounted on 0.05 x 0.05" (1.3 x 1.3mm) solder pad

3. Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts


## RATINGS AND CHARACTERISTIC CURVES

( $T_A = 25^\circ\text{C}$  unless otherwise noted)


**Fig. 1 - Derating Curve for Output Rectified Current**

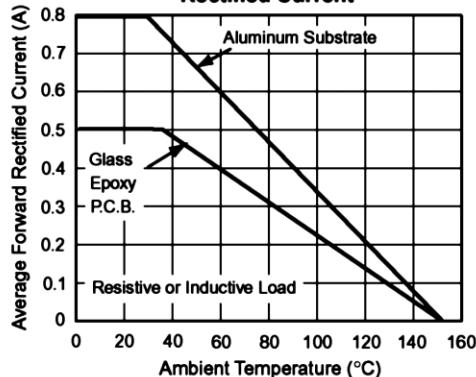


**Fig. 2 - Maximum Non-Repetitive Peak Forward Surge Current Per Leg**

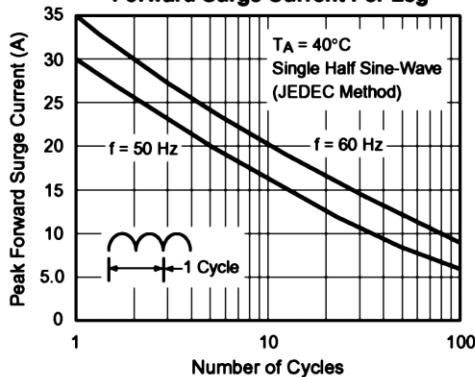

**Fig. 3 - Typical Forward Voltage Characteristics Per Leg**

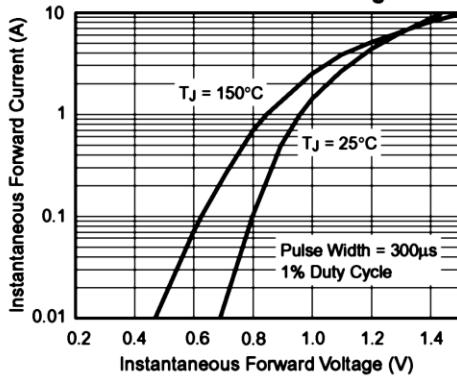

**Fig. 4 - Typical Reverse Leakage Characteristics Per Leg**

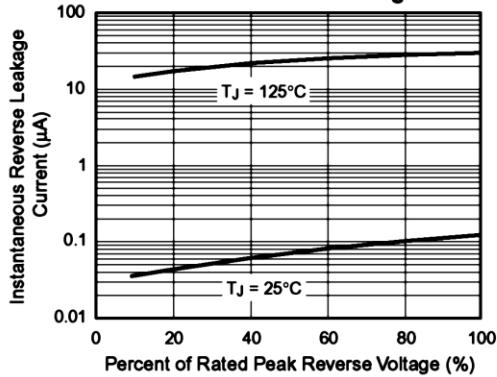

**Fig. 5 - Typical Junction Capacitance Per Leg**

